
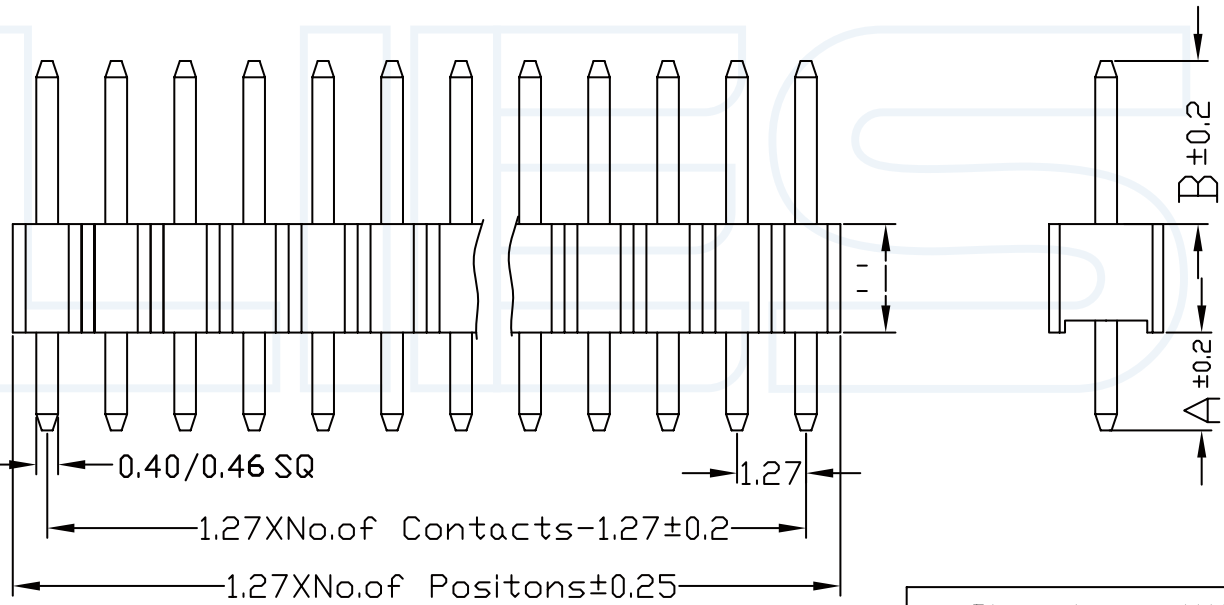


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing:PA6T+30%G.F UL94V-0,Color:Black
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN
 Contact: Brass/0.8u"MIN GOLD PLATING
 OVER ALL 30u"MIN NICKEL UNDERPLATING
 OVER ALL

2-特性 (characteristics):
 额定电流: 1 AMP
 Raring Current:1 AMP .
 接触阻抗: 20mΩ MAX.
 Contact Resistance:20mΩ MAX .
 绝缘阻抗: 1000MΩMIN.
 Insulating Resistance:1000MΩMIN.
 耐电压: AC 500V.
 Withstanding Voltage:AC 500V.
 温度范围: -40度至+105度
 Temperature Range: -40°Cto +105°C

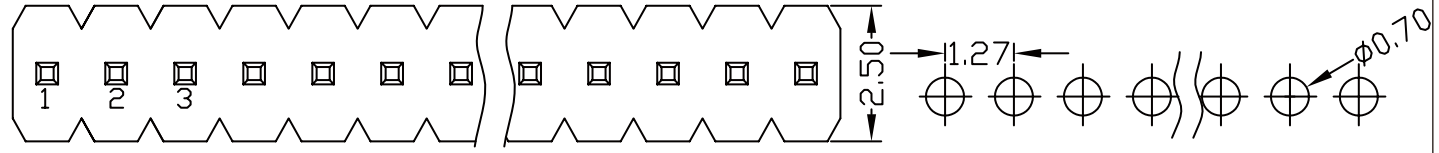

ORDERING INFORMATION
13XX-11 XX XX X S XXX X X

NO.OF PINS PER ROW: 02-50P
 INSULATOR MATERIAL: B:PA6T, C:PA9T, D:LCP
 CONTACT PLATING: FULL OF GOLD SEMI-GOLD, A0=0.8u", B0=0.8U", A9=30u", B9=30U"
 S1=ORDINARY TIN PLATED, S2=MATTE TIN PLATED, S3=TIN-PLATED HIGH-TEMPERATURE

PACKING: A:PE Bag, B:TOPE&REED, C:TUBE, D:TUBE+CAP, E:TRAY

HEIGHT OF HOUSING: 16:1.6mm, 20:2.0mm, 25:2.54mm
 LENGTH OF TERMINAL: 0.40/0.46 SQ, 1.27XNo.of Contacts-1.27±0.2, 1.27XNo.of Positons±0.25

Dimension antitheses list						
ITEM	A	B		H		
Standard	1.8	1.8	3.0	4.0	1.6	2.0
Alternate						

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE: 15-1.27mm 单排排针 单塑180度
 DATE: 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn
 PROJECTON: [Symbol] REV: A UNIT: mm SCALE: 1:1 PAGE: 1/1
 PART NO.: 13XX-11XXXXXSXXXX1 DRAWING NO.: