
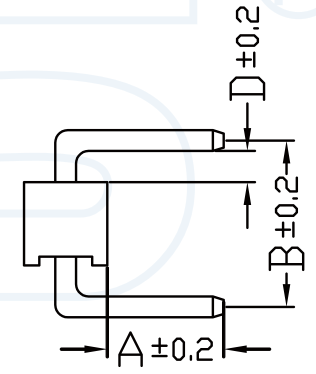
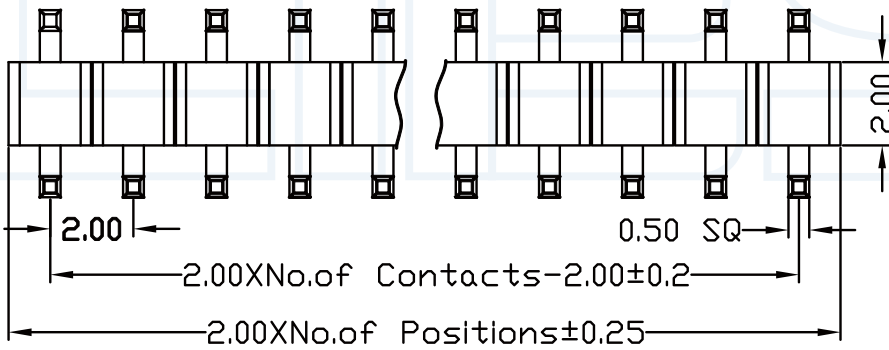
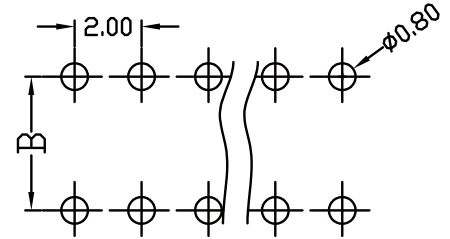


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

1-材料 (MATERIAL)  
 胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色  
 Housing:PA6T+30%G.F UL94V-0, Color:Black  
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN  
 Contact: Brass/0.8u"MIN GOLD PLATING  
 OVER ALL 30u"MIN NICKEL UNDERPLATING  
 OVER ALL

2-特性 (characteristics):  
 额定电流: 2AMP  
 Raring Current:2 AMP .  
 接触阻抗: 20mΩ MAX.  
 Contact Resistance:20mΩ MAX .  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance:1000MΩMIN.  
 耐电压: AC 500V.  
 Withstanding Voltage:AC 500V.  
 温度范围: -40度至+105度  
 Temperature Range: -40°Cto +105°C

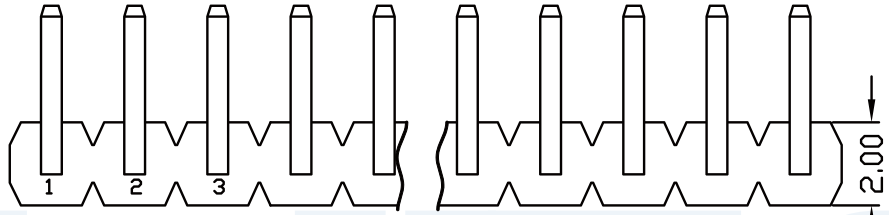

**ORDERING INFORMATION**  
**1520-11 XX XX X R XXX X 1**

NO. OF PINS PER ROW: 02-40P  
 HEIGHT OF HOUSING: 20:2.0mm  
 CONTACT PLATING: FULL OF GOLD SEMI-GOLD  
 A0=0.8u" B0=0.8U"  
 ... ..  
 A9=30u" B9=30U"  
 S1=ORDINARY TIN PLATED  
 S2=MATTE TIN PLATED  
 S3=TIN-PLATED HIGH-TEMPERATURE

INSULATOR MATERIAL:  
 A:PBT  
 B:PA6T  
 C:PA9T  
 D:LCP

LENGTH OF TERMINAL

PACKING:  
 A:PE Bag  
 B:TOPE&REED  
 C:TUBE  
 D:TUBE+CAP  
 E:TRAY

2.00XNo.of Contacts-2.00±0.2  
 2.00XNo.of Positions±0.25

Dimension antitheses list			
ITEM	A	B	D
Standard	2.8	4.0	0.75
Alternate			

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE: 50-2.0mm 单排排针 单塑桥形  
 DATE: 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: 1520-11XXXXXRXXXX1 DRAWING NO: