

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国强
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**




**1-材料 (MATERIAL)**

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色  
Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black  
四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN  
Contact: Brass/0.8u"MIN GOLD PLATING  
OVER ALL 30u"MIN NICKEL UNDERPLATING  
OVER ALL

**2-特性 (characteristics):**

额定电流: 3 AMP  
Raring Current: 3 AMP  
接触阻抗: 20mΩ MAX.  
Contact Resistance: 20mΩ MAX.  
绝缘阻抗: 1000MΩMIN.  
Insulating Resistance: 1000MΩMIN.  
耐电压: AC 500V.  
Withstanding Voltage: AC 500V.  
温度范围: -40度至+105度  
Temperature Range: -40°C to +105°C

**ORDERING INFORMATION**  
**16XX-21 XX XX X M XXX X X**

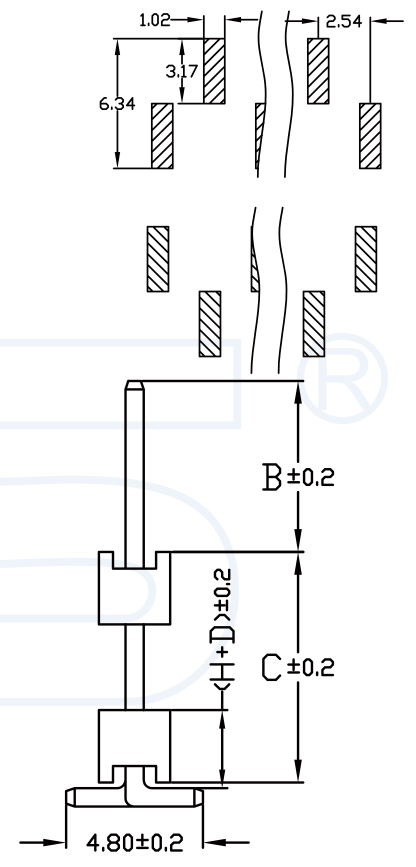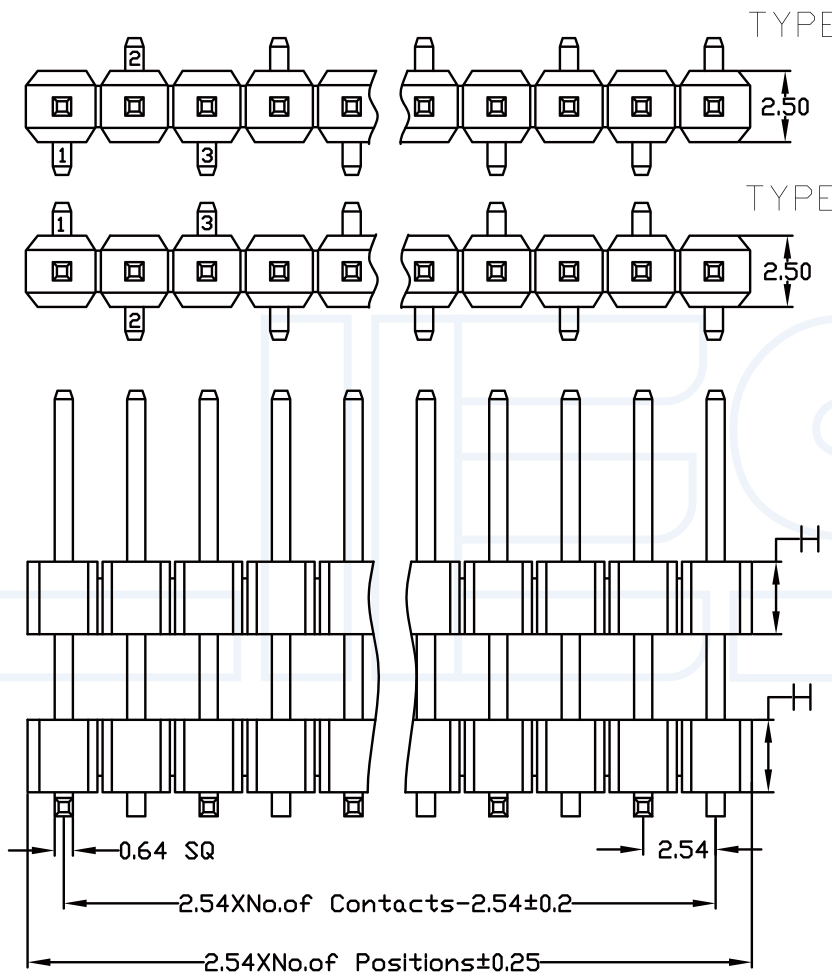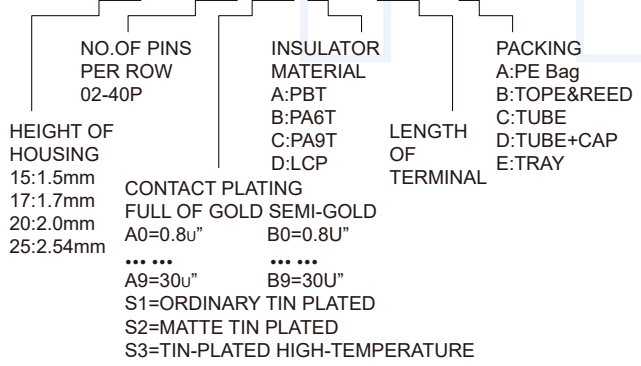

Dimension antitheses list						
ITEM	B	H		D	C	
Standard	6.0	1.5	1.7	2.0	2.54	0.6
Alternate						

<b>东莞市瑞翔精密连接器有限公司</b> DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn	TITLE	67-2.54mm 单排排针 双塑SMT				DATE	2018-02-18
	PROJECTON	REV	UNIT	SCALE	PAGE	PART NO:	DRAWING NO:
	A	mm	1:1	1/1	16XX-21XXXXXMXXXXX		