

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric


Specifications/备注 (Remark)

1-材料 (MATERIAL)


胶芯: PBT+30%G.F UL94V-0, 颜色: 黑色
Housing: PBT+30%G.F UL94V-0, Color: Black
四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN
Contact: Brass/0.8u"MIN GOLD PLATING
OVER ALL 30u"MIN NICKEL UNDERPLATING
OVER ALL

2-特性 (characteristics):

额定电流: 3 AMP
Raring Current: 3 AMP .
接触阻抗: 20mΩ MAX.
Contact Resistance: 20mΩ MAX .
绝缘阻抗: 1000MΩMIN.
Insulating Resistance: 1000MΩMIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40度至+105度
Temperature Range: -40°Cto +105°C

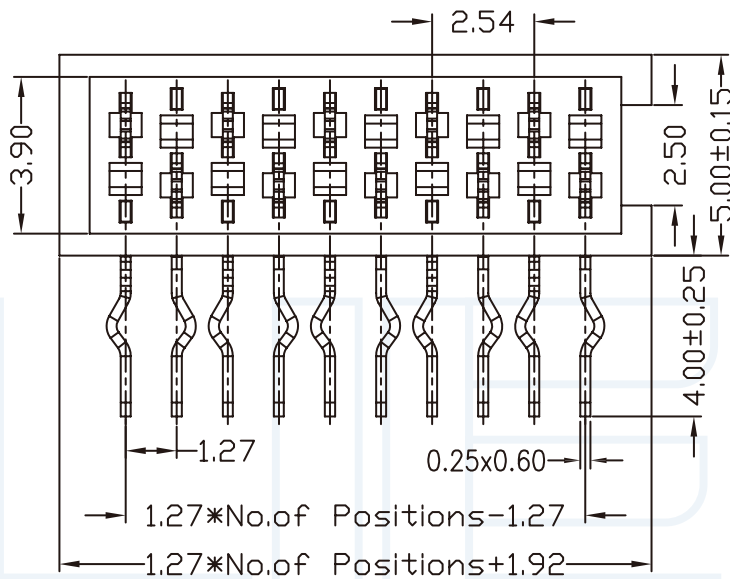



Recommended P.C.B Layout (Top Side)

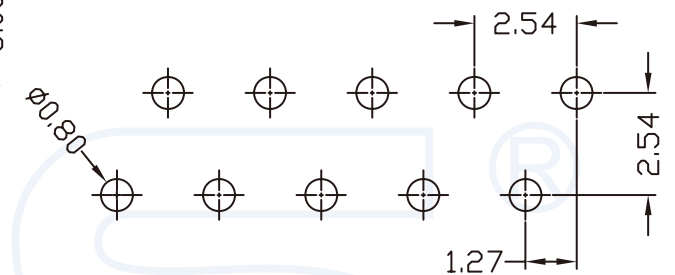

ORDERING INFORMATION

56R-XX 1 50 XX A RN X

NO.OF PINS PER ROW 04-20P	HEIGHT OF HOUSIGH 40:4.0mm 50:5.0mm	CONTACT SHAPE S:STRAIGHT R:RIGHT ANGLE	LATCH SHAPE: W:WITH LATCH N:WITHOUT LATCH
.....	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U"	Contact Shape: S: Straight R: Right Angle
.....	A9=30u" B9=30U"	
.....	S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	

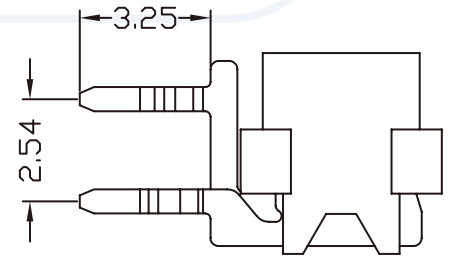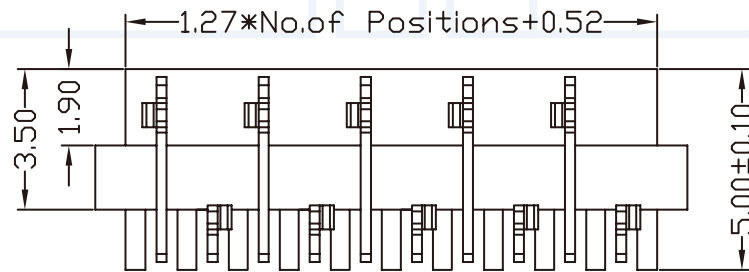

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

223-板端 IDC 一件式 90度 无耳

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

56R-XX150XXARNX

DRAWING NO:

1

2

3

4

5

6

7

8

9