



1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA6T+30%G. UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G. UL94V-0, Color: Black
 端子: 黄铜
 Contact: Brass

2-特性 (characteristics):
 额定电流: 3.00 AMP
 Raring Current: 3.00 AMP .
 接触阻抗: 20mΩ MAX.
 Contact Resistance: 20mΩ MAX .
 绝缘阻抗: 1000MΩMIN.
 Insulating Resistance: 1000MΩMIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40度至+105度
 Temperature Range: -40°C to +105°C

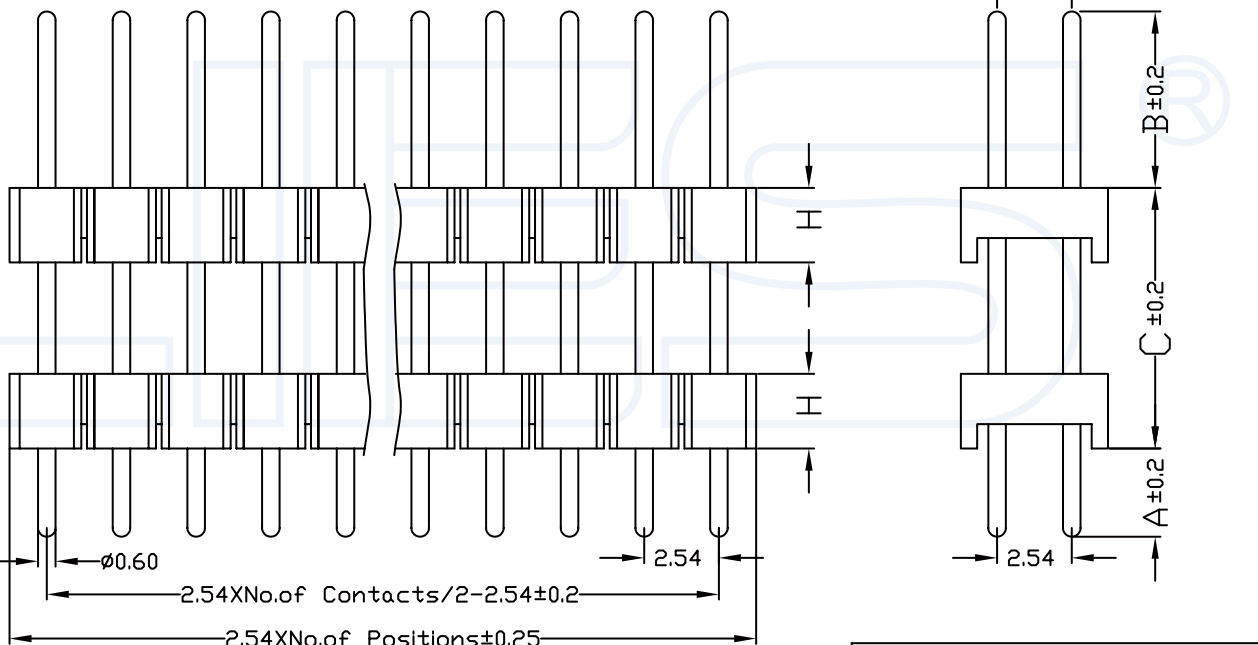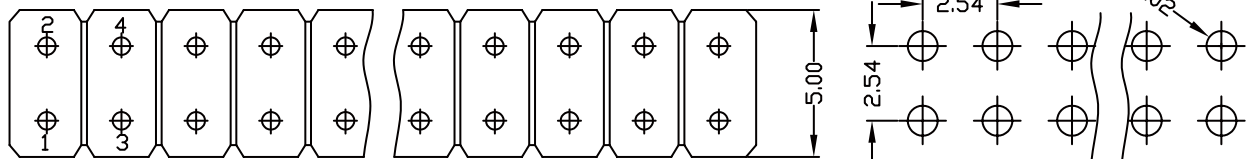

ORDERING INFORMATION
R1625-22 XX XX B S XX X X

NO.OF PIGNS PER ROW: 02-40P

INSULATOR MATERIAL:
 B:PA6T
 C:PA9T
 D:LCP

LENGTH OF TERMINAL OF
 A:PE BAG
 B:TAPE&REEL
 C:TUBE
 D:TUBE+CAP
 E:TRAY

CONTACT PLATING
 A0=0.8U" B0=0.8U"

 A9=30U" B9=30U"
 S1=ORDINARY TIN PLATED
 S2=MATTE TIN PLATED
 S3=TIN-PLATED HIGH-TEMPERATURE

CONTACT SHAPE:
 S:STRAIGHT
 R:RIGHT ANGLE
 M:SMT

JOURNAL NUMBER
 1:TYPE1
 2:TYPE2

ITEM	A	B	H	C		
Standard	3.0	6.0	1.5	1.7	2.0	2.54
Alternate						

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE: 255-2.54mm 双排双塑圆针 180度
 DATE: 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: R1625-22XXXXBSXXXX DRAWING NO:

1 2 3 4 5 6 7 8 9