

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PBT+30%G. UL94V-0, 颜色: 黑色
 Housing: PBT+30%G. UL94V-0, Color: Black
 端子: 黄铜



Contact: Brass CuZn 36Pb3 (C3600)
 相配针: ϕ 0.43mm
 Connecting Pin: ϕ 0.43mm

2-特性 (characteristics):

额定电流: 1.00 AMP
 Raring Current: 1.00 AMP .
 接触阻抗: 10m Ω MAX.
 Contact Resistance: 10m Ω MAX .
 绝缘强度: MIN 1000V RMS.
 Dielectric Strength: MIN 1000V RMS.

ORDERING INFORMATION
R2430-2 XX X XB S 074 C 1

HEIGHT OF HOUSING: 30:3.0mm
 NO.OF ARRAY PITCH: 5:10.16mm, 6:15.24mm, 8:19.05mm
 INSULATOR MATERIAL: G:PPS
 NO.OF PINS PER ROW: 01-40P
 CONTACT PLATING OF TERMINAL: A=1U", B=2U",, E=15U", F=30U"
 LENGTH OF TERMINAL: S=ORDINARY TIN PLATED, H=HALF GOLD PLATED TIN

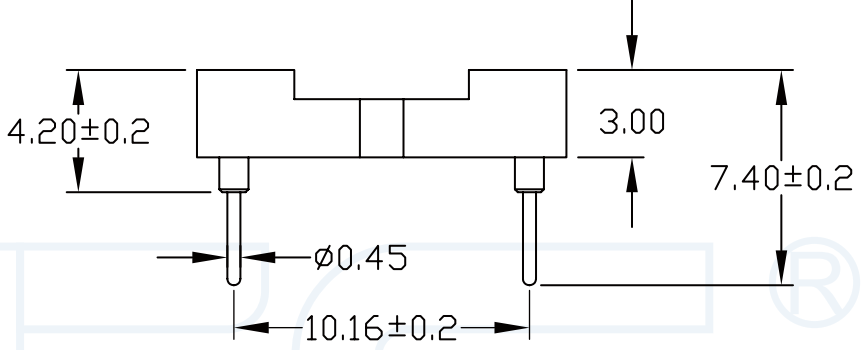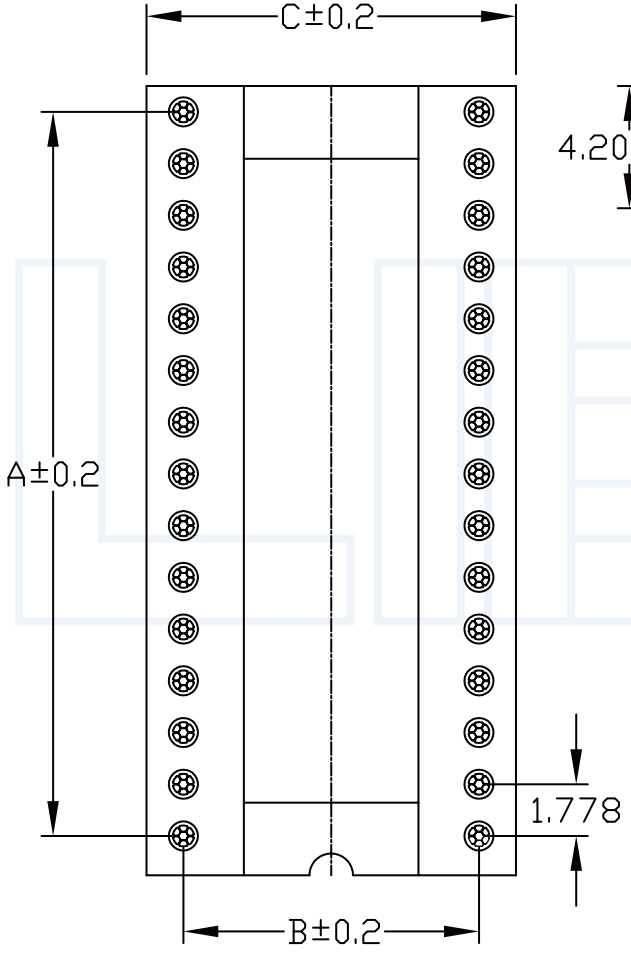

See page 33	No.of Positions	A	B	C
fig. 1	24	21.8	10.16	12.7
fig. 2	28	25.2	10.16	12.7
fig. 3	30	27.0	10.16	12.7
fig. 4	32	28.8	10.16	12.7
fig. 5	48	43.1	10.16	12.7
fig. 6	20	18.1	15.24	17.64
fig. 7	24	21.7	15.24	17.64
fig. 8	28	25.2	15.24	17.64
fig. 9	40	35.8	15.24	17.64
fig. 10	42	37.7	15.24	17.64
fig. 11	48	43.1	15.24	17.64
fig. 12	52	46.7	15.24	17.64
fig. 13	56	50.2	15.24	17.64
fig. 14	64	57.3	15.24	17.64
fig. 15	68	60.9	15.24	17.64
fig. 16	64	57.3	19.05	21.45

YLIES 东莞市瑞翔精密连接器有限公司 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD
 Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 267-1.778mm 圆孔IC座 **DATE** 2018-02-18

PROJECTON **REV** A **UNIT** mm **SCALE** 1:1 **PAGE** 1/1 **PART NO:** R2430-2XXXXBS074C1 **DRAWING NO:**