

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)


1-材料 (MATERIAL)

胶芯: PPS+30%G. UL94V-0, 颜色: 黑色
Housing: PPS+30%G. UL94V-0, Color: Black
端子: 黄铜

Contact: Brass CuZn 36Pb3(C3600)
相配针: ϕ 0.47mm
Connecting Pin: ϕ 0.47mm

2-特性 (characteristics):

额定电流: 3.00 AMP
Raring Current: 3.00 AMP .
接触阻抗: 10m Ω MAX.
Contact Resistance: 10m Ω MAX .
绝缘强度: MIN 1000V RMS.
Dielectric Strength: MIN 1000V RMS.

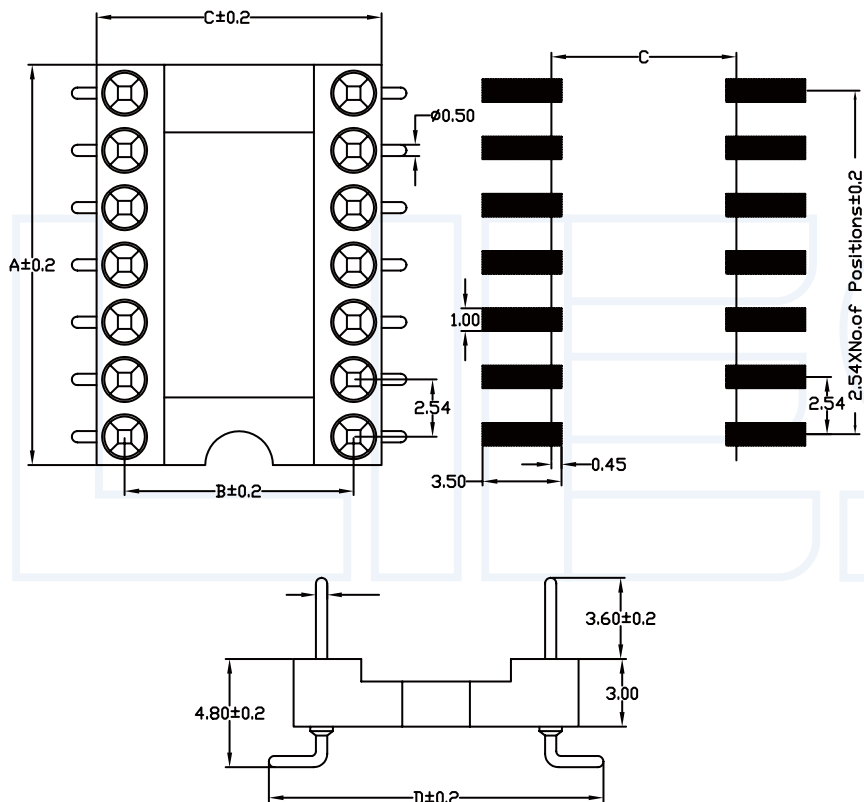

See page 33	No. of Positions	A	B	C	D
fig. 1	6	7.6	7.62	10.1	12.30
fig. 2	8	10.1	7.62	10.1	
fig. 3	10	12.6	7.62	10.1	
fig. 4	12	15.2	7.62	10.1	
fig. 5	14	17.7	7.62	10.1	
fig. 6	16	20.3	7.62	10.1	
fig. 7	18	22.8	7.62	10.1	
fig. 8	20	25.3	7.62	10.1	
fig. 9	22	27.8	7.62	10.1	
fig. 10	24	30.4	7.62	10.1	
fig. 11	28	35.5	7.62	10.1	
fig. 12	20	25.4	10.16	12.6	14.84
fig. 13	22	27.8	10.16	12.6	
fig. 14	24	30.4	10.16	12.6	
fig. 15	28	35.5	10.16	12.6	
fig. 16	32	40.6	10.16	12.6	
fig. 17	24	30.5	15.24	17.7	19.92
fig. 18	28	35.5	15.24	17.7	
fig. 19	32	40.6	15.24	17.7	
fig. 20	36	45.7	15.24	17.7	
fig. 21	40	50.8	15.24	17.7	
fig. 22	42	53.3	15.24	17.7	
fig. 23	48	60.9	15.24	17.7	

ORDERING INFORMATION

R2630-2 XX X X G M 100C1

Height of Housing: 30:3.0mm
No. of Array Pitch: 0:No Pitch, 1:1.27, 2:2.54
Insulator Material: A:PBT, G:PPS
Lehgh of Terminal
No. of Row: 1:Single Row, 2: Dual Row, 3: Three Row
No. of Pins Per Row: 06-48P
CONTACT PLATING: A=1U", B=2U", ..., E=15U", F=30U", S=Ordinary Tin Plated, H=Half Gold Plated Tin

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE: 284-2.54mm IC 圆孔排针 SMT DATE: 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: R2630-2XXXXGM100C1 DRAWING NO: