


1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

Insulator:Black glass filled polyester
 PPS-GF30-FR
 Flammability:UL94V-0
 Sleeve:Brass CuZn 36Pb3(36000)
 Contact clip(4 finger):Beryllium copper(C17200)
 Mating pin:Ø0.40 to 0.56mm
 Forces:(polished steel gauge Ø0.43mm)
 Insertion:2.0 N typ
 Withdrawal:1.0 N typ
 Mechancial life:min 500 cycles
 Rated current:1.0Amp
 Contact resistance:Max 10mΩ
 Dielectric resistance:Min 1000V RMS

See page 33	No.of Positions	A	B	C	D
fig. 1	6	7.6	7.62	10.1	12.26
fig. 2	8	10.1	7.62	10.1	12.26
fig. 3	10	12.6	7.62	10.1	12.26
fig. 4	12	15.2	7.62	10.1	12.26
fig. 5	14	17.7	7.62	10.1	12.26
fig. 6	16	20.3	7.62	10.1	12.26
fig. 7	18	22.8	7.62	10.1	12.26
fig. 8	20	25.3	7.62	10.1	12.26
fig. 9	22	27.8	7.62	10.1	12.26
fig. 10	24	30.4	7.62	10.1	12.26
fig. 11	28	35.5	7.62	10.1	12.26

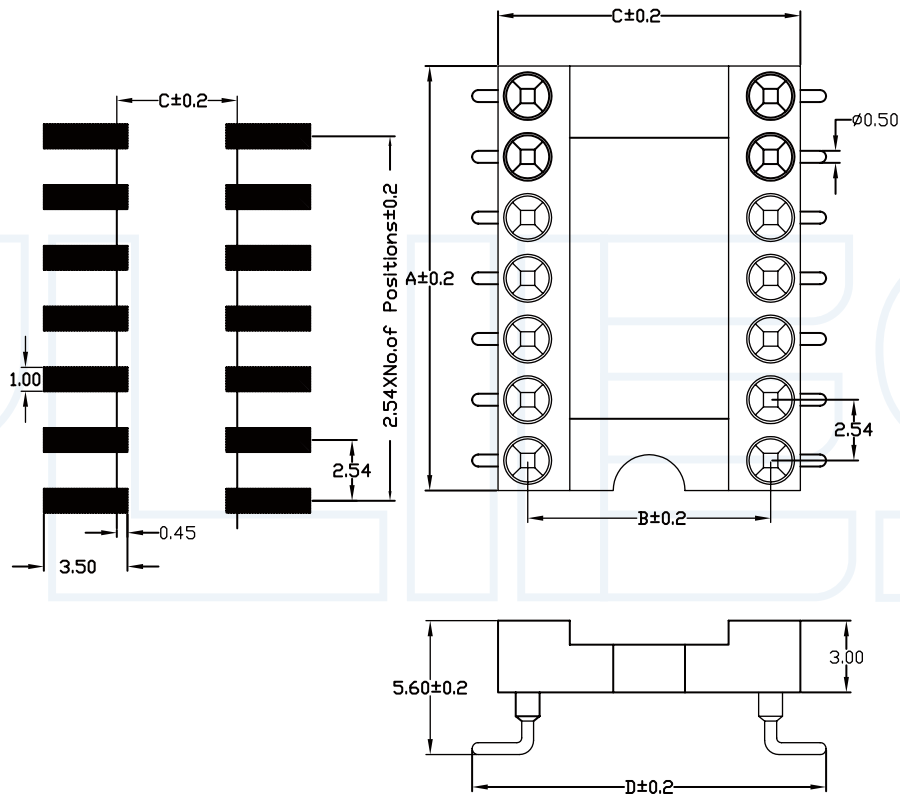

ORDERING INFORMATION
R2630-2 XX X XG M 074 C 1

HEIGHT OF HOUSING:
 30:3.0mm

NO.OF PINS PER ROW:
 06-48P

NO.OF ARRAY PITCH
 0:NO PITCH
 4:7.62mm
 5:10.16mm
 6:15.24mm

CONTACT PLATING
 A=1U"
 B=2U"
 ...
 E=15U"
 F=30U"
 S=ORDINARY TIN PLATED
 H=HALF GOLD PLATED TIN

LENGTH OF TERMINAL

fig. 12	20	25.4	10.16	12.6	14.80
fig. 13	22	27.8	10.16	12.6	14.80
fig. 14	24	30.4	10.16	12.6	14.80
fig. 15	28	35.5	10.16	12.6	14.80
fig. 16	32	40.6	10.16	12.6	14.80
fig. 17	24	30.5	15.24	17.7	19.88
fig. 18	28	35.5	15.24	17.7	19.88
fig. 19	32	40.6	15.24	17.7	19.88
fig. 20	36	45.7	15.24	17.7	19.88
fig. 21	40	50.8	15.24	17.7	19.88
fig. 22	42	53.3	15.24	17.7	19.88
fig. 23	48	60.9	15.24	17.7	19.88

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 290-2.54mm IC 圆孔排母 SMT DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: R2630-2XXXXGM074C1 DRAWING NO:

1 2 3 4 5 6 7 8 9