

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国强
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric


Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA6T+30%G. UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G. UL94V-0, Color: Black
 端子: 黄铜
 Contact: Brass

2-特性 (characteristics):

额定电流: 3.00 AMP
 Raring Current: 3.00 AMP .
 接触阻抗: 20mΩ MAX.
 Contact Resistance: 20mΩ MAX .
 绝缘阻抗: 1000MΩMIN.
 Insulating Resistance: 1000MΩMIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40度至+105度
 Temperature Range: -40°Cto +105°C

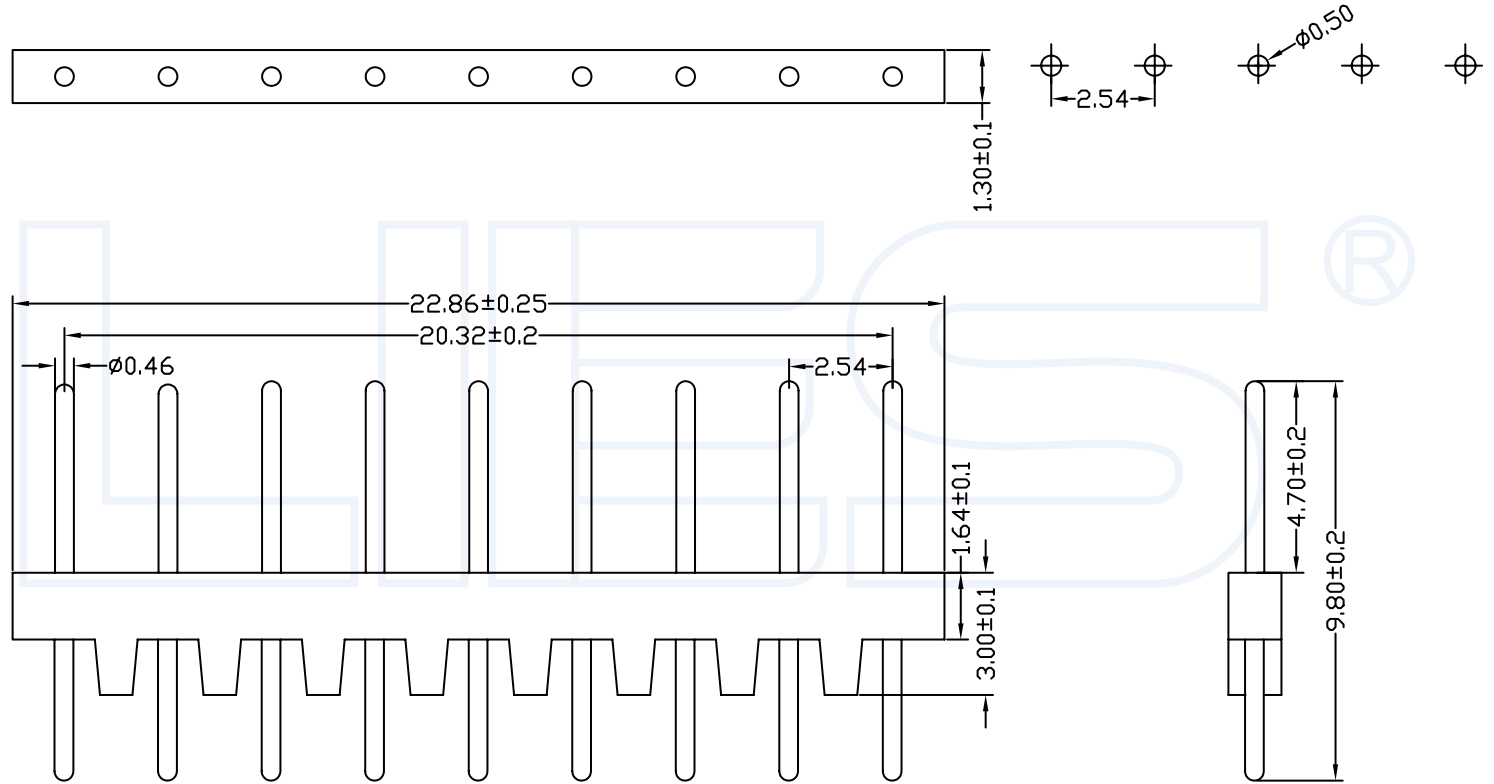

ORDERING INFORMATION

R1616- 109 0 XX S 098 1

HEIGHT OF HOUSING: 16:1.6mm
 NO.OF ARRAY PITCH: 0:NO PITCH, 4:7.62mm, 5:10.16mm, 6:15.24mm
 NO.OF PINS PER ROW: 01-40P
 LENGTH OF TERMINAL
 CONTACT PLATING: A=1U", B=2U",, E=15U", F=30U", S=ORDINARY TIN PLATED, H=HALF GOLD PLATED TIN

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE: 301-2.54mm 光纤连接器 DATE: 2018-02-18

PROJECTON: [Symbol] REV: A UNIT: mm SCALE: 1:1 PAGE: 1/1 PART NO: R1616-1090XXS0981 DRAWING NO:

1 2 3 4 5 6 7 8 9