



ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

1-材料 (MATERIAL)  
 胶芯: PBT+30%G.F UL94V-0  
 Housing: PA6T+30%G.F UL94V-0  
 端子: 黄铜、磷铜、青铜  
 Contact: Brass、Phosphor、bronz  
 2-特性 (characteristics):  
 额定电流: 3 AMP  
 Raring Current: 3 AMP .  
 接触阻抗: 30mΩ MAX.  
 Contact Resistance: 30mΩ MAX .  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance: 1000MΩMIN.  
 耐电压: AC 1000V.  
 Withstanding Voltage: AC 1000V.  
 温度范围: -55度至+105度  
 Temperture Range: -55°Cto +105°C

**ORDERING INFORMATION**



NUMBER OF CONTACTS	Pitch	ROWS/Positions with Contacts
32	64	a b
16	32	a-
16	32	5.08 HALF-LOADED ALL EVEN NO.

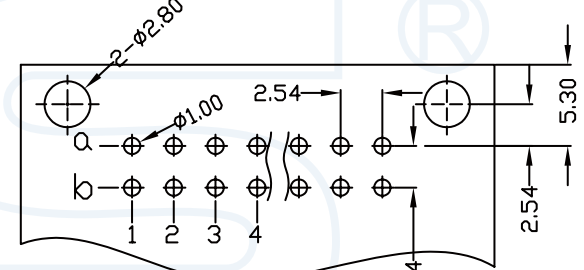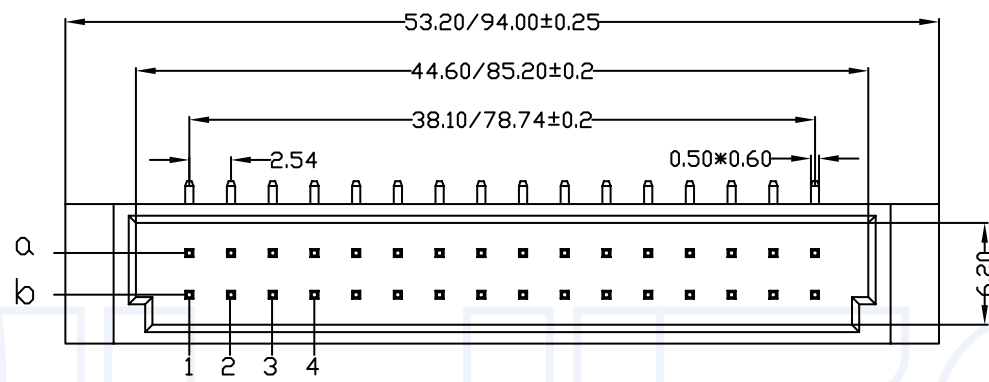

**ORDERING INFORMATION**

**N-2 XX MR XXX X 1**

NO.OF PINS 16P Per Row 32P Per Row	TYPE S=180° R=90°	INSULATOR MATERIAL A:PBT B:PA6T C:PA9T	PACKING A:PE Bag B:TOPE&REED C:TUBE D:TRAY
DIN 41612	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U" ... .. A9=30u" B9=30U" S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE		

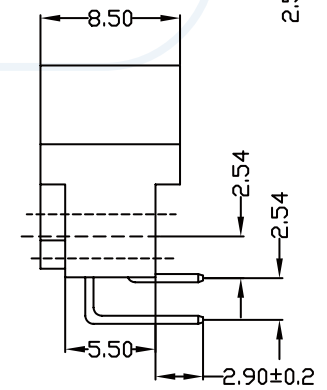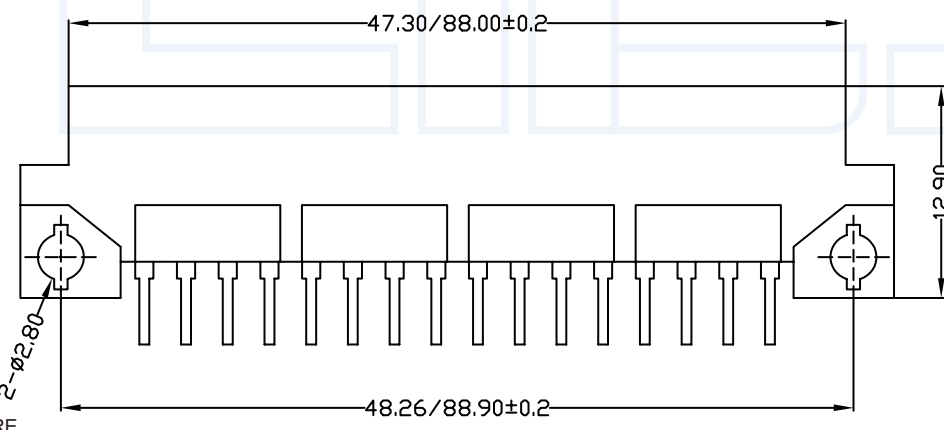

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE: 317-2.54mm 欧式插针双排 90度  
 DATE: 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PART NO: N-2XXMRXXXX1  
 DRAWING NO:

PROJECTON	REV	UNIT	SCALE	PAGE
	A	mm	1:1	1/1