
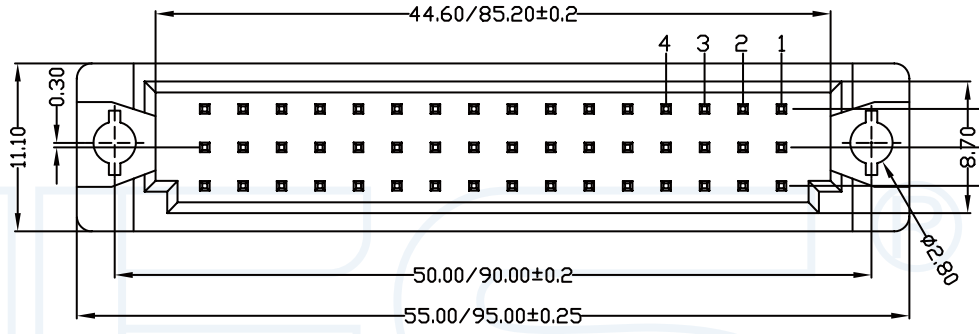


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

DIM"A"	2.50	4.00
--------	------	------

Specifications/备注 (Remark)



1-材料 (MATERIAL)
 胶芯: PBT+30%G.F UL94V-0
 Housing: PA6T+30%G.F UL94V-0
 端子: 黄铜、磷铜、青铜
 Contact: Brass、Phosphor、bronz
 2-特性 (characteristics):
 额定电流: 3 AMP
 Raring Current: 3 AMP .
 接触阻抗: 30mΩ MAX.
 Contact Resistance: 30mΩ MAX .
 绝缘阻抗: 1000MΩMIN.
 Insulating Resistance: 1000MΩMIN.
 耐电压: AC 1000V.
 Withstanding Voltage: AC 1000V.
 温度范围: -55度至+105度
 Temperture Range: -55°Cto +105°C

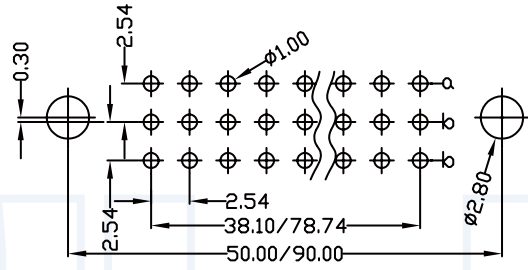

ORDERING INFORMATION

N-3 XX M S XXX X 1

NO. OF PINS 16P Per Row 32P Per Row	TYPE S=180° R=90°	INSULATOR PACKING MATERIAL A: PBT B: TOPE&REED B: PA6T C: TUBE C: PA9T D: TRAY
DIN 41612	TYPE F=FEMALE M=MALE	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U" A9=30u" B9=30U" S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE

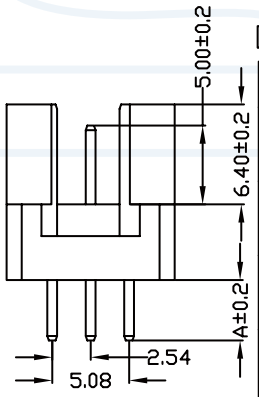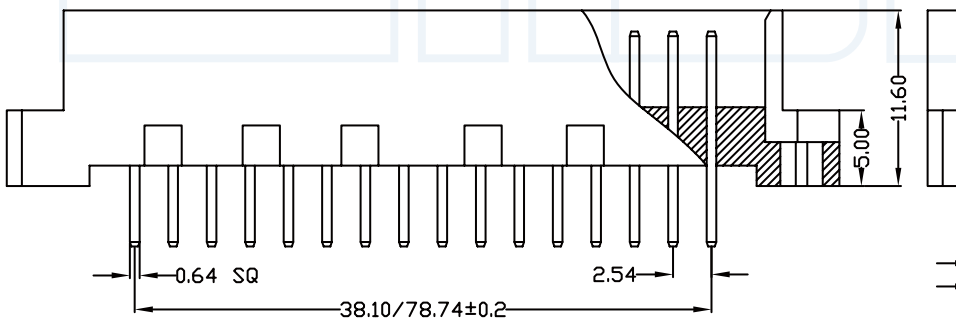

ORDERING INFORMATION

NUMBER OF CONTACTS	Pitch	ROWS/Positions with Contacts
48	96	a+b+c
32A	64A	a+c
32B	64B	a+b
16	32	a
24	48	a+b+c ALL EVEN NO
16	32	a+b ALL EVEN NO

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE: 319-2.54mm 欧式插针三排 180度 DATE: 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV	UNIT	SCALE	PAGE	PART NO:	DRAWING NO:
	A	mm	1:1	1/1	N-3XXMSXXXX1	