

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)


1-材料 (MATERIAL)

胶芯: PA9T UL94V-0
Housing: PA9T UL94V-0
端子(焊片): 磷青铜(黄铜)
Contact (Solder Tab): Phosphor bronze(Brass)




2-特性 (characteristics):

额定电压: 50V AC/DC .
Voltage Rating: 50V AC/DC .
额定电流: 1 AMP (AWG #28-32) .
Rating Current: 1 AMP (AWG #28-32) .
接触阻抗: ≤20mΩ MAX.
Contact Resistance: ≤20mΩ MAX.
绝缘阻抗: ≥100MΩMIN.
Insulating Resistance: ≥100MΩMIN.
耐电压: 500V AC/MINUTE
Withstanding Voltage: 500V AC/MINUTE
温度范围: -25度至+85度
Temperature Range: -25°C to +85°C

Poles	DIM.A	DIM.B
2×5A	4.00	7.30
2×10A	9.00	12.30
2×15A	14.00	17.30
2×20A	19.00	22.30
2×25A	24.00	27.30

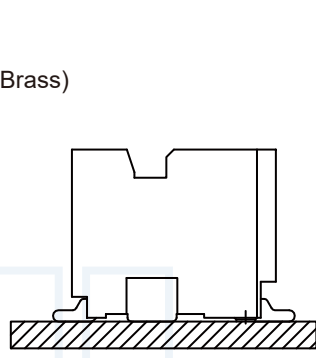

Assembly Layout

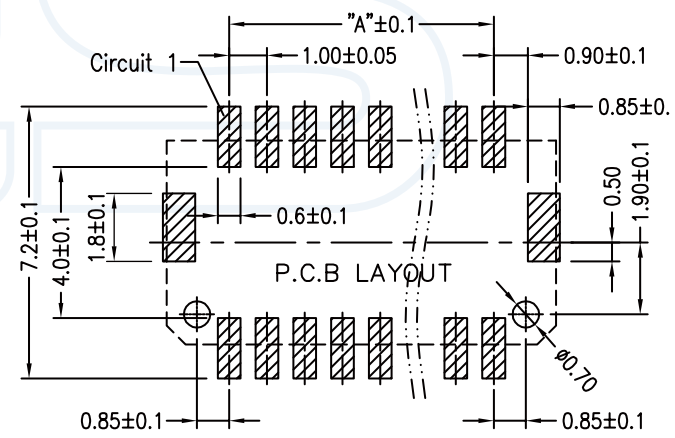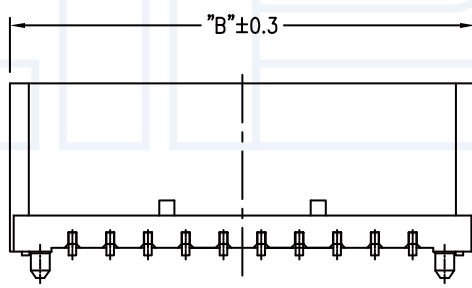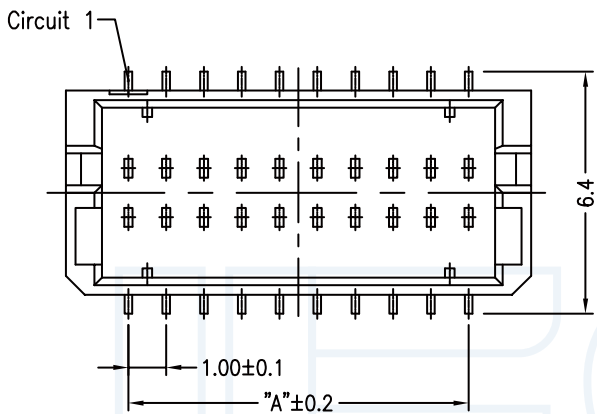

ORDERING INFORMATION

W10-XX XX X XX X

NO.OF PINS Per Row 05-25P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 10:1.0mm	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U"	CONTACT SHAPE LT:STRAIGHT SMT WT:RIGHT ANGLE SME
..... A9=30u" B9=30U" S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	

3

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 337-1.0mm 立贴 双排插针(SHD)-B DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: W10-XXXXCLTB DRAWING NO: