


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Poles	DIM.A	DIM.B	DIM.C
2P	1.5	3.4	4.5
3P	3.0	4.9	6.0
4P	4.5	6.4	7.5
5P	6.0	7.9	9.0
6P	7.5	9.4	10.5
7P	9.0	10.9	12.0
8P	10.5	12.4	13.5
9P	12.0	13.9	15.0
10P	13.5	15.4	16.5
11P	15.0	16.9	18.0
12P	16.5	18.4	19.5
13P	18.0	19.9	21.0
14P	19.5	21.4	22.5
15P	21.0	22.9	24.0
16P	22.5	24.4	25.5

**Specifications/备注 (Remark)**

1-材料 (MATERIAL)  
 胶芯: PA66 UL94V-0  
 Housing: PA66 UL94V-0

2-特性 (characteristics):  
 额定电压: 50V AC/DC .  
 Voltage Rating: 50V AC/DC .  
 额定电流: 1 AMP (AWG #26-32) .  
 Raring Current: 1 AMP (AWG #26-32) .  
 接触阻抗: ≤20mΩ MAX.  
 Contact Resistance: ≤20mΩ MAX.  
 绝缘阻抗: ≥100MΩMIN.  
 Insulating Resistance: ≥100MΩMIN.  
 耐电压: 500V AC/MINUTE  
 Withstanding Voltage: 500V AC/MINUTE  
 温度范围: -25度至+85度  
 Temperture Range: -25°Cto +85°C

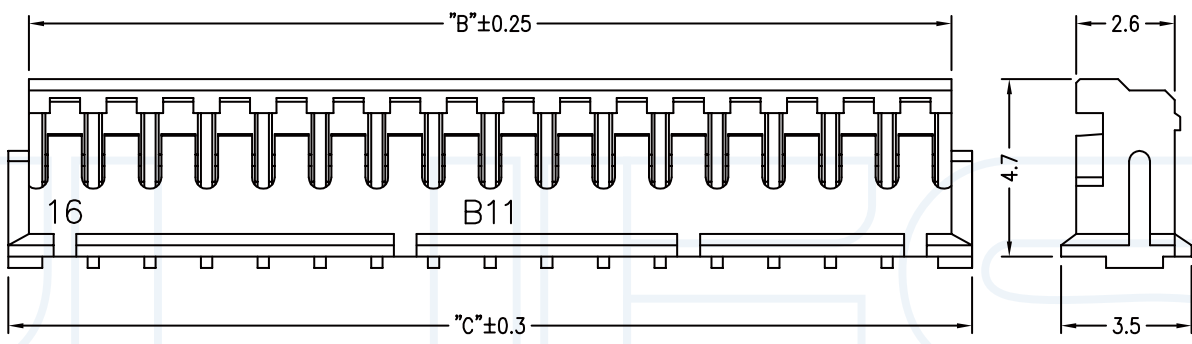


**ORDERING INFORMATION**

**H 15-XX F X X**

NO.OF PINS Per Row 02-16P  
 INSULATOR MATERIAL  
 A:PA46  
 B:PA66  
 C:PA9T  
 D:LCP

PACKING  
 A:PE Bag  
 B:TUBE  
 C:TRAY

SERLES NO 15:1.5mm  
 TYPE  
 F=FEMALE  
 M=MALE  
 P=PIERCE

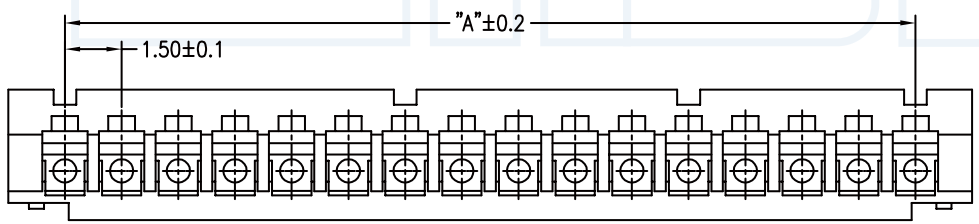

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 359-1.5mm 胶壳单排(ZH) DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: H15-XXFBA DRAWING NO: