


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 端子: 磷青铜
 Contact: Phosphor bronze

2-特性 (characteristics):
 额定电压: 125V AC/DC .
 Voltage Rating:125V AC/DC .
 额定电流: 1 AMP (AWG #28-30) .
 Raring Current:1 AMP (AWG #28-30) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance:≤20mΩ MAX .
 绝缘阻抗: ≥100MΩMIN.
 Insulating Resistance:≥100MΩMIN.
 耐电压: 250V AC/MINUTE
 Withstanding Voltage:250V AC/MINUTE
 温度范围: -25度至+85度
 Temperture Range: -25°Cto +85°C

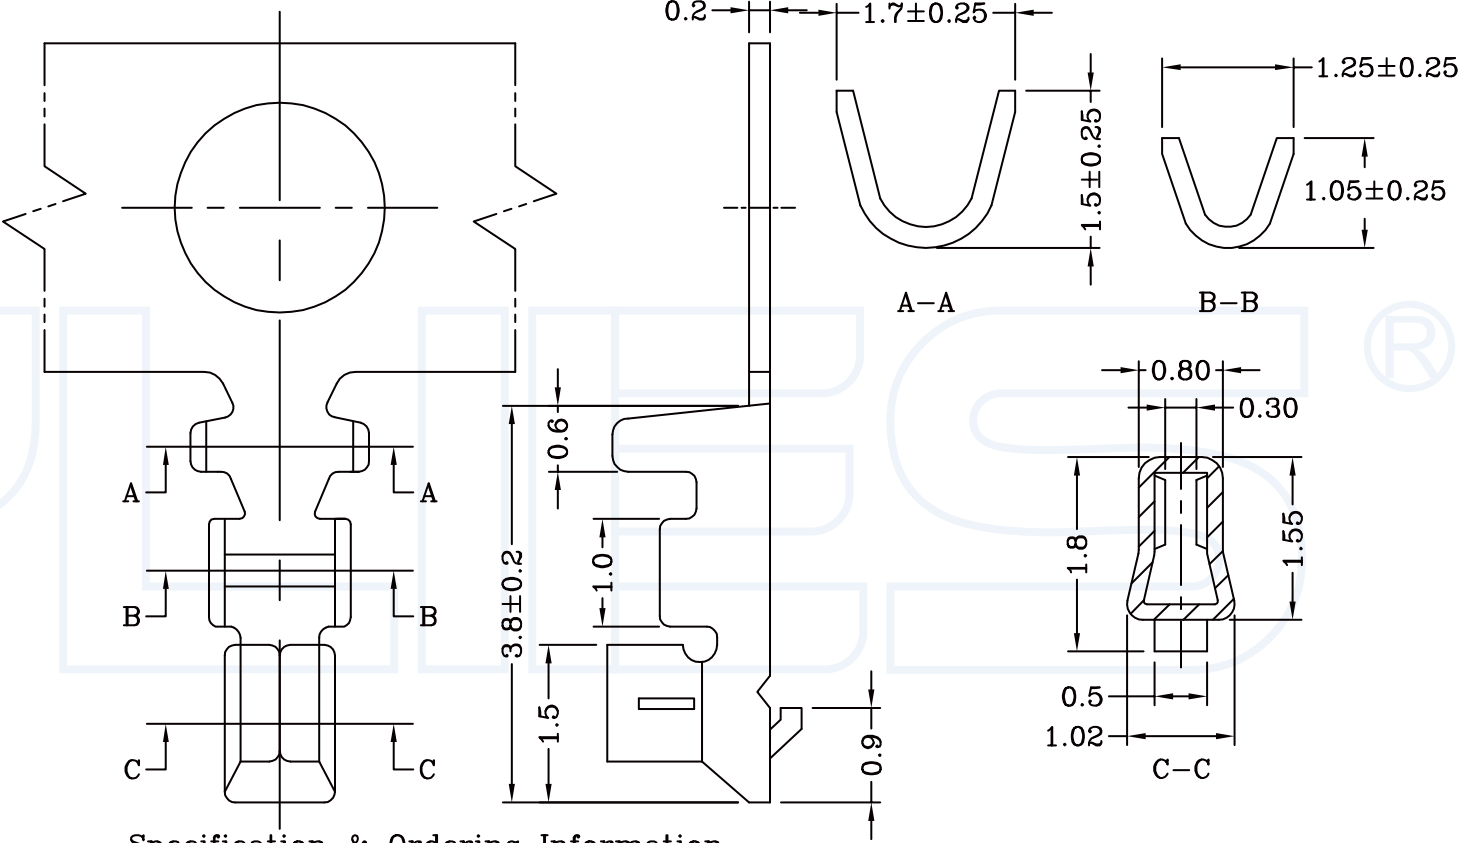

ORDERING INFORMATION

T15- XX XX

SERLES NO
15:1.5mm

CONTACT PLATING
FULL OF GOLD SEMI-GOLD
A0=0.8u" B0=0.8U"

.....
A9=30u" B9=30U"

S1=ORDINARY TIN PLATED
S2=MATTE TIN PLATED
S3=TIN-PLATED HIGH-TEMPERATURE

PACKING QTY

TERMINAL
M:MALE
F:FEMALE

Specification & Ordering Information

Part No	Wire Range	Insulation O.D	Material	Finsh
1.5T-1-T	AWG #26-#32	0.90mm(MAX)	Phosphor bronze	Tin-Plated

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 360-1.5mm 端子(ZH) DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV A	UNIT mm	SCALE 1:1	PAGE 1/1	PART NO: T15-S1XC	DRAWING NO:
-----------	-------	---------	-----------	----------	-------------------	-------------