
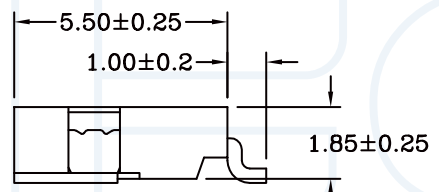
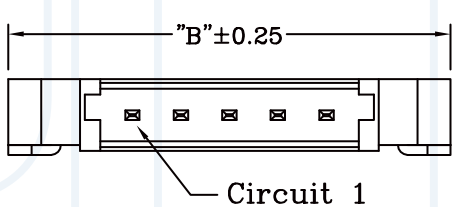


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA9T UL94V-0
 Housing:PA9T UL94V-0
 端子(焊片): 磷青铜(黄铜)
 Contact (Solder Tab):
 Phosphor bronze(Brass)

2-特性 (characteristics):
 额定电压: 50V AC/DC
 Voltage Rating:50V AC/DC
 额定电流: 1 AMP (AWG #28-32)
 Raring Current: 1 AMP (AWG #28-32)
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance:≤20mΩ MAX.
 绝缘阻抗: ≥100MΩMIN.
 Insulating Resistance:≥100MΩMIN.
 耐电压: 500V AC/MINUTE
 Withstanding Voltage:500V AC/MINUTE
 温度范围: -25度至+85度
 Temperture Range: -25°Cto +85°C

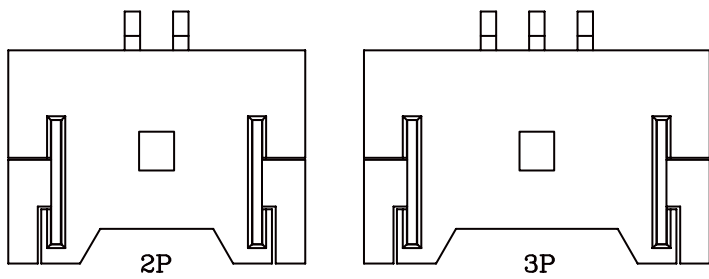

Part No.	DIMENSIONS		
	DIM.A	DIM.B	DIM.C
1.25T-4-2AW	1.25	7.65	7.65
1.25T-4-3AW	2.50	8.90	8.90
1.25T-4-4AW	3.75	10.15	10.15
1.25T-4-5AW	5.00	11.40	11.40
1.25T-4-6AW	6.25	12.65	12.65
1.25T-4-7AW	7.50	13.90	13.90
1.25T-4-8AW	8.75	15.15	15.15
1.25T-4-9AW	10.00	16.40	16.40
1.25T-4-10AW	11.25	17.65	17.65
1.25T-4-11AW	12.50	18.90	18.90
1.25T-4-12AW	13.75	20.15	20.15
1.25T-4-13AW	15.00	21.40	21.40
1.25T-4-14AW	16.25	22.65	22.65
1.25T-4-15AW	17.50	23.90	23.90
1.25T-4-20AW	23.75	30.15	30.15
1.25T-4-30AW	36.25	42.65	42.65




ORDERING INFORMATION

W125-XX XX X XX X

NO.OF PINS Per Row 02-30P
 SERLES NO 125:1.25mm
 CONTACT PLATING FULL OF GOLD SEMI-GOLD
 A0=0.8u" B0=0.8U"
 A9=30u" B9=30U" S1=ORDINARY TIN PLATED
 S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE

INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP
 CONTACTL SHAPE LT:STRAIGHT SMT WT:RIGHT ANGLE SME

PACKING A:PE Bag B:TUBE C:TRAY

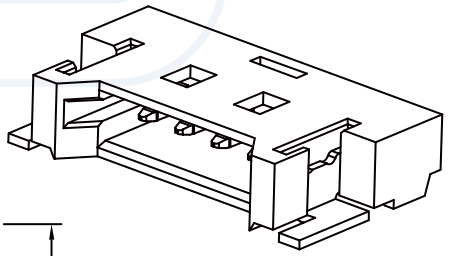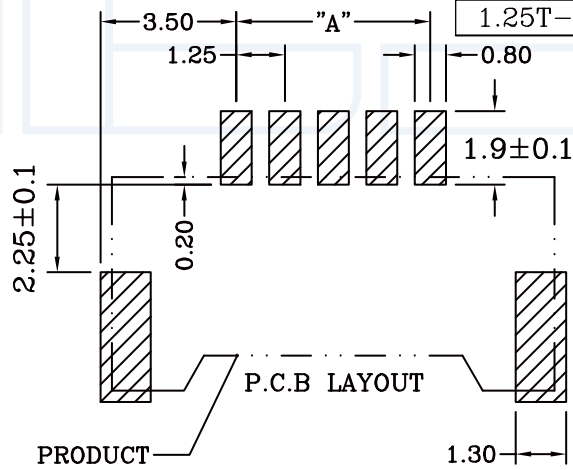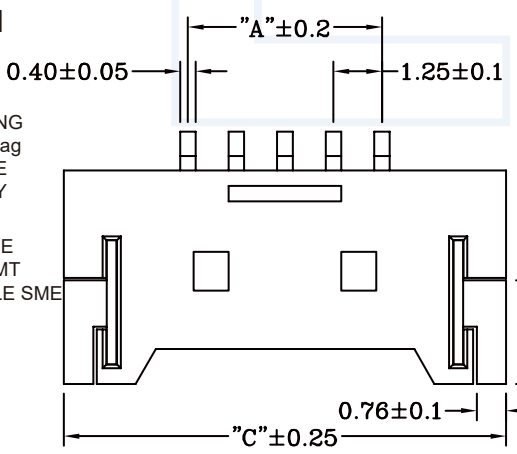

4

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 348-1.25mm 卧贴 单排插针 DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: W125-XXXXCWTB DRAWING NO: