

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric


**Specifications/备注 (Remark)**

- 1-材料 (MATERIAL)  
 胶芯: PA46 UL94V-0  
 Housing: PA46 UL94V-0  
 端子: 黄铜  
 Contact: Brass
- 2-特性 (characteristics):  
 额定电压: 50V AC/DC  
 Voltage Rating: 50V AC/DC  
 额定电流: 2 AMP (AWG #24-30)  
 Rating Current: 2 AMP (AWG #24-30)  
 接触阻抗: ≤10mΩ MAX.  
 Contact Resistance: ≤10mΩ MAX.  
 绝缘阻抗: ≥1000MΩMIN.  
 Insulating Resistance: ≥1000MΩMIN.  
 耐电压: 100V AC/MINUTE  
 Withstanding Voltage: 100V AC/MINUTE  
 温度范围: -25度至+85度  
 Temperature Range: -25°C to +85°C

**ORDERING INFORMATION**

**W20-XX XX X XX X**

- |                                 |   |   |
|---------------------------------|---|---|
| NO.OF PINS<br>Per Row<br>02-16P | INSULATOR<br>MATERIAL<br>A:PA46<br>B:PA66<br>C:PA9T<br>D:LCP                              | PACKING<br>A:PE Bag<br>B:TUBE<br>C:TRAY   |
| SERLES NO<br>20:2.0mm           | CONTACT PLATING<br>FULL OF GOLD SEMI-GOLD<br>A0=0.8u" B0=0.8U"                            | CONTACT SHAPE<br>S: Straight<br>R: Right Angle<br>LT: STRAIGHT SMT<br>WT: RIGHT ANGLE SME |
| ... ..<br>A9=30u" B9=30U"       | ... ..<br>S1=ORDINARY TIN PLATED<br>S2=MATTE TIN PLATED<br>S3=TIN-PLATED HIGH-TEMPERATURE |   |

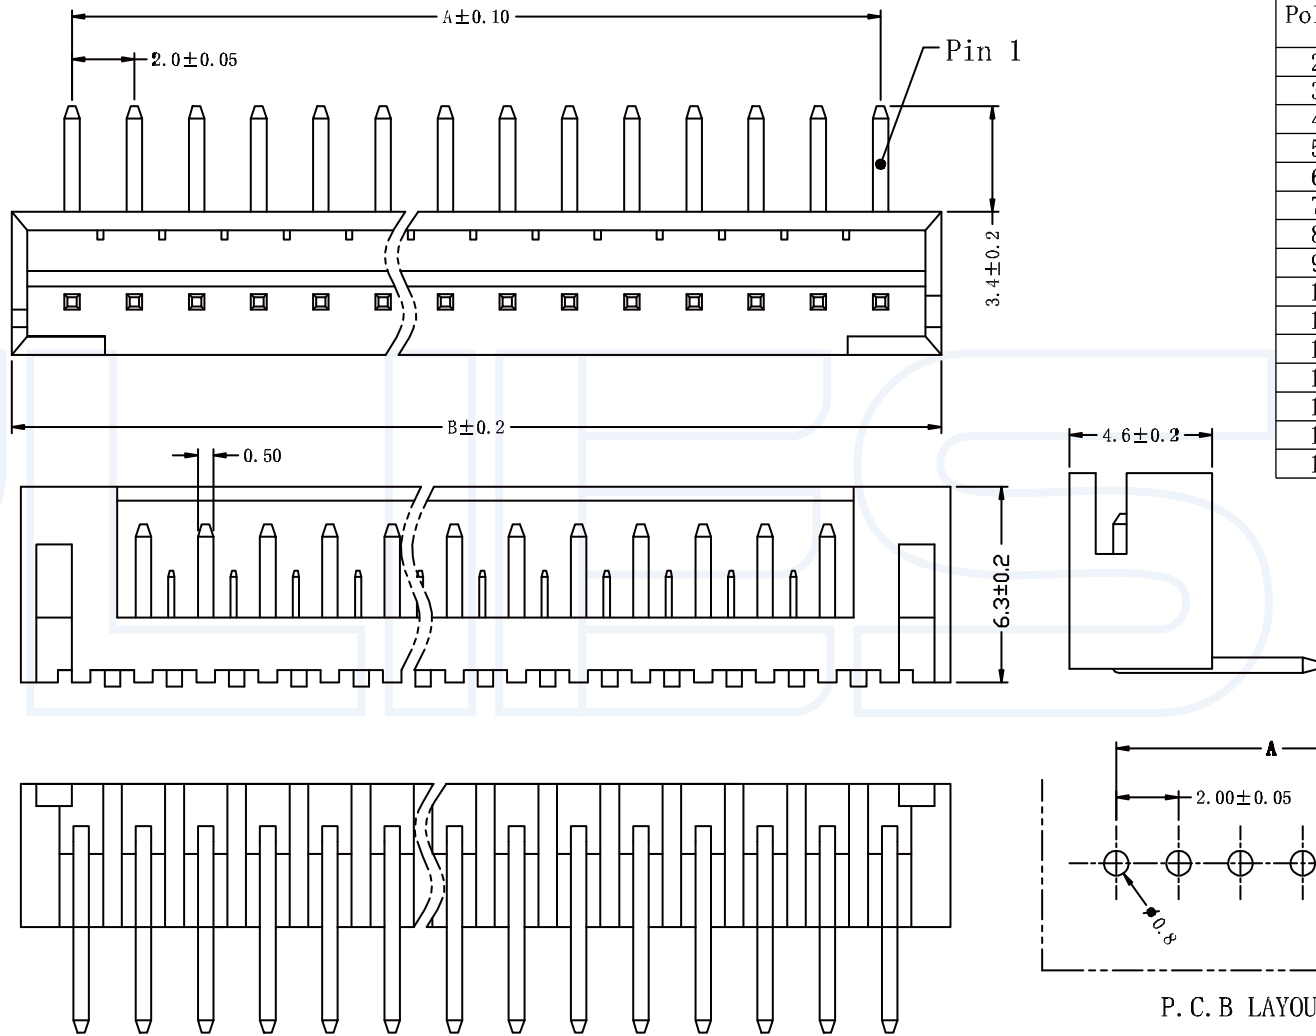

Poles	尺寸	
	A	B
2	2.0	5.9
3	4.0	7.9
4	6.0	9.9
5	8.0	11.9
6	10.0	13.9
7	12.0	15.9
8	14.0	17.9
9	16.0	19.9
10	18.0	21.9
11	20.0	23.9
12	22.0	25.9
13	24.0	27.9
14	26.0	29.9
15	28.0	31.9
16	30.0	33.9

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

362-2.0mm 单排插针90度

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

W20-XXS1BRA

DRAWING NO:

1 2 3 4 5 6 7 8 9