

1 2 3 4 5 6 7 8 9



ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

1-材料 (MATERIAL)  
 胶芯: PA66 UL94V-2  
 Housing:PA66 UL94V-2

2-特性 (characteristics):  
 额定电压: 250V AC/DC .  
 Voltage Rating:250V AC/DC .  
 额定电流: 3 AMP (AWG #22-28) .  
 Raring Current:3 AMP (AWG #22-28) .  
 接触阻抗: ≤20mΩ MAX.  
 Contact Resistance:≤20mΩ MAX.  
 绝缘阻抗: ≥1000MΩMIN.  
 Insulating Resistance:≥1000MΩMIN.  
 耐电压: 1000V AC/MINUTE  
 Withstanding Voltage:1000V AC/MINUTE  
 温度范围: -25度至+85度  
 Temperture Range: -25°Cto +85°C

Poles	DIM.A	DIM.B	DIM.C
2P	2.5	5.7	7.5
3P	5.0	8.2	10.0
4P	7.5	10.7	12.5
5P	10.0	13.2	15.0
6P	12.5	15.7	17.5
7P	15.0	18.2	20.0
8P	17.5	20.7	22.5
9P	20.0	23.2	25.0
10P	22.5	25.7	27.5
11P	25.0	28.2	30.0
12P	27.5	30.7	32.5
13P	30.0	33.2	35.0
14P	32.5	35.7	37.5
15P	35.0	38.2	40.0

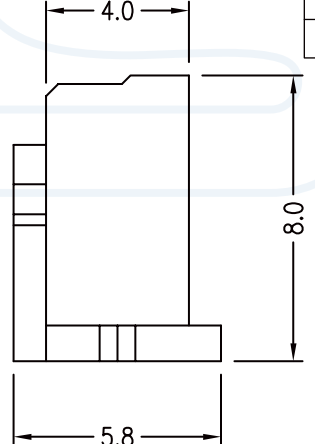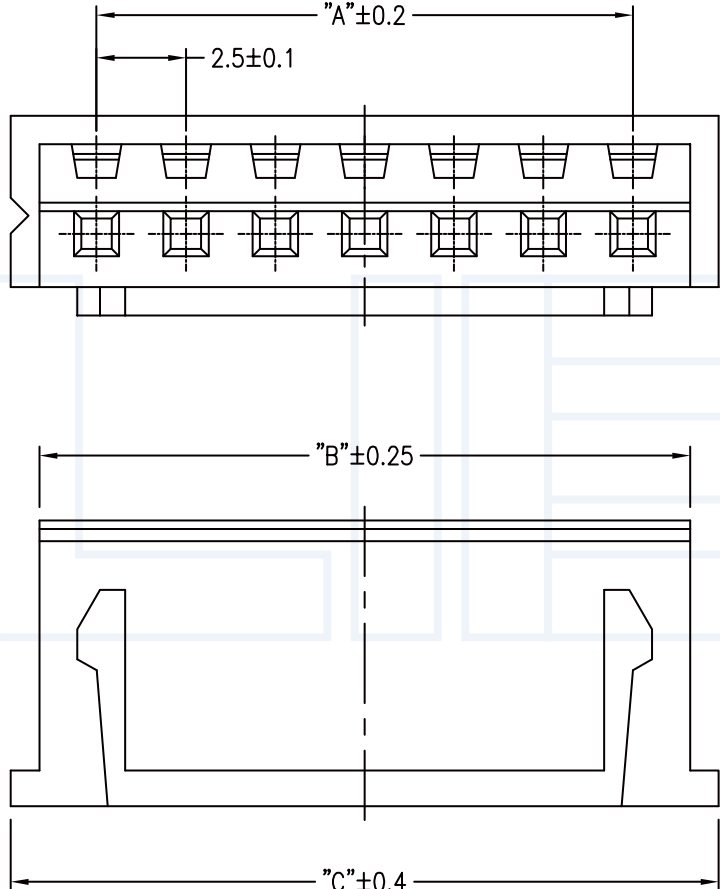

**ORDERING INFORMATION**

**H 254--XX X X X**

NO.OF PINS Per Row 02-20P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 254:2.54mm	TYPE F=FEMALE M=MALE P=PIERCE	

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE: 381-2.54mm 胶壳单排(XH) DATE: 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1 PART NO: H254-XXXBA DRAWING NO:

1 2 3 4 5 6 7 8 9