


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA66 UL94V-0
 Housing: PA66 UL94V-0
 端子: 黄铜
 Contact: Brass

2-特性 (characteristics):
 额定电压: 250V AC/DC .
 Voltage Rating: 250V AC/DC .
 额定电流: 3 AMP (AWG #22-28) .
 Raring Current: 3 AMP (AWG #22-28) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance: ≤20mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1500V AC/MINUTE
 Withstanding Voltage: 1500V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°C to +85°C

Part No.	Dimension (mm)	
	A	B
W2545R-02	2.54	7.62
W2545R-03	5.08	10.16
W2545R-04	7.62	12.70
W2545R-05	10.16	15.24
W2545R-06	12.70	17.78
W2545R-07	15.24	20.32
W2545R-08	17.78	22.86
W2545R-09	20.32	25.40
W2545R-10	22.86	27.94
W2545R-11	25.40	30.48
W2545R-12	27.94	33.02
W2545R-13	30.48	35.56
W2545R-14	33.02	38.10
W2545R-15	35.56	40.64
W2545R-16	38.10	43.18
W2545R-17	40.64	45.72
W2545R-18	43.18	48.26
W2545R-19	45.72	50.80
W2545R-20	48.26	53.34

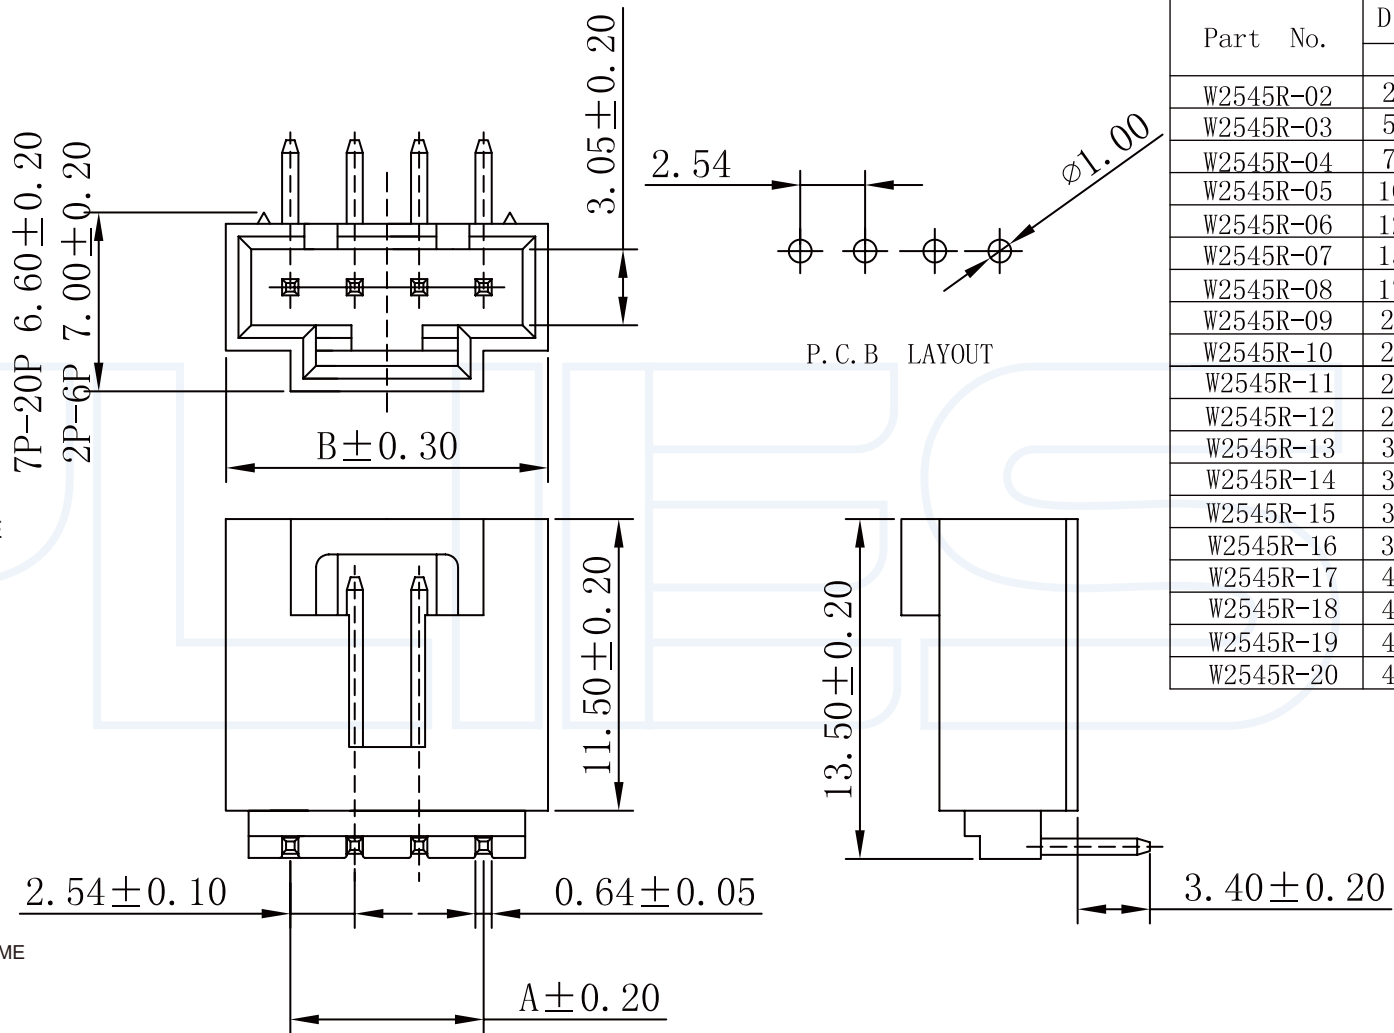

ORDERING INFORMATION
W254-XX XX X XX X

NO.OF PINS Per Row 02-20P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 254:2.54mm	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8U" B0=0.8U" A9=30U" B9=30U" S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	CONTACT SHAPE S: Straight R: Right Angle LT: STRAIGHT SMT WT: RIGHT ANGLE SME

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 394-2.54mm 单排插针90度(CD-ROM) DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: W254-XXS1BRA DRAWING NO: