

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA46 UL94V-0
Housing: PA46 UL94V-0
端子: 黄铜
Contact: Brass


2-特性 (characteristics):

额定电压: 250V AC/DC .
Voltage Rating: 250V AC/DC .
额定电流: 5 AMP(AWG #22-24) .
Raring Current: 5 AMP(AWG #22-24) .
接触阻抗: ≤20mΩ MAX.
Contact Resistance: ≤20mΩ MAX.
绝缘阻抗: ≥1000MΩMIN.
Insulating Resistance: ≥1000MΩMIN.
耐电压: 1500V AC/MINUTE
Withstanding Voltage: 1500V AC/MINUTE
温度范围: -25度至+85度
Temperature Range: -25°Cto +85°C

ORDERING INFORMATION

W30-XX XX X XX X

NO.OF PINS Per Row 02-12P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 30:3.0mm	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U"	CONTACTL SHAPE S: Straight R: Right Angle LT: STRAIGHT SMT WT: RIGHT ANGLE SME
..... A9=30u" B9=30U"	S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	

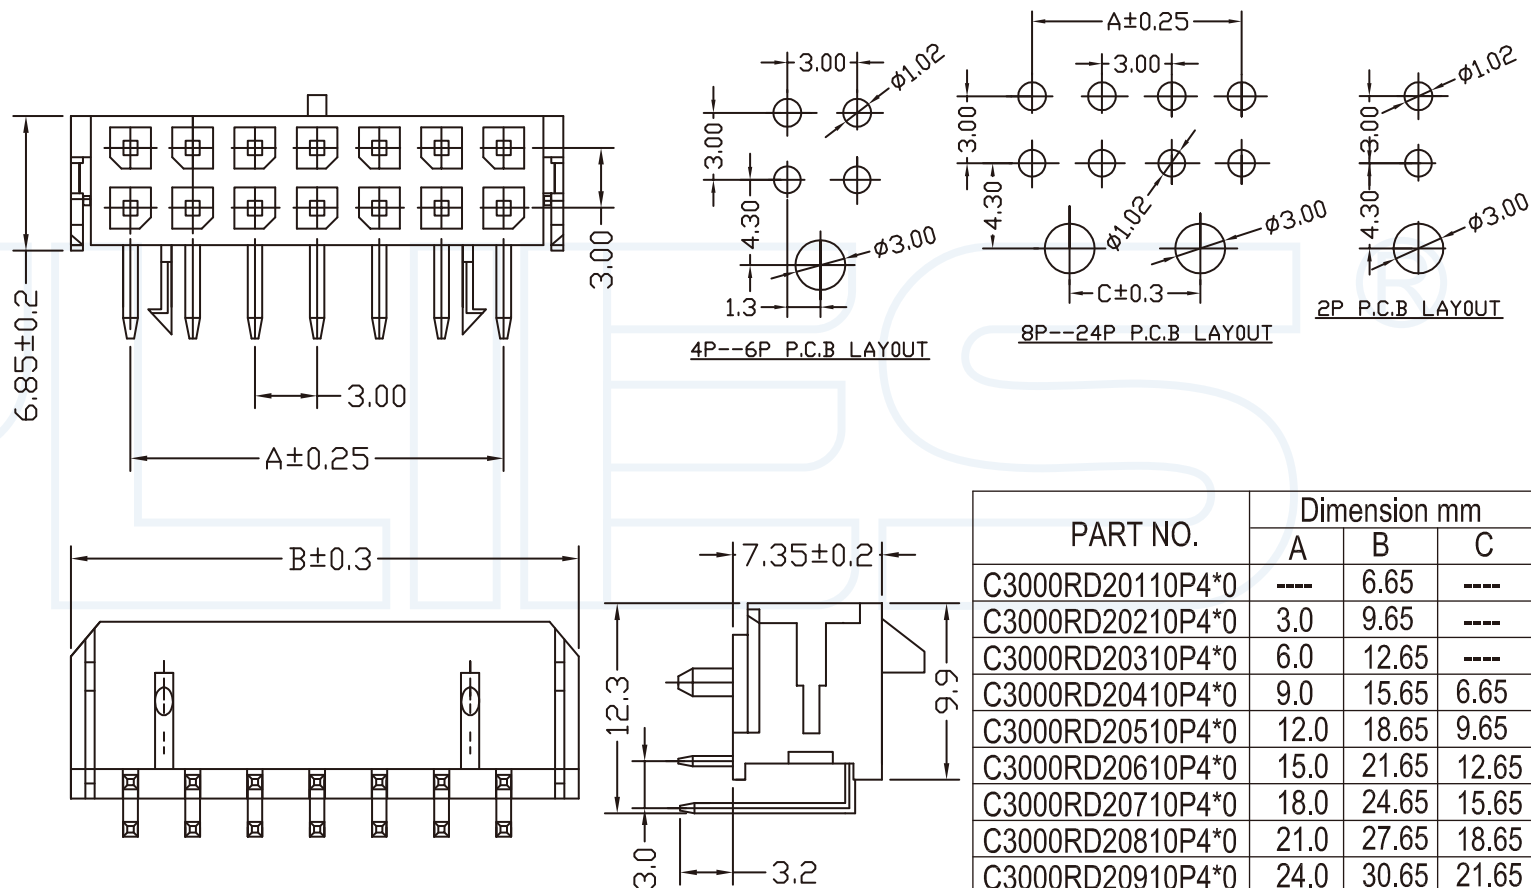

PART NO.	Dimension mm		
	A	B	C
C3000RD20110P4*0	----	6.65	----
C3000RD20210P4*0	3.0	9.65	----
C3000RD20310P4*0	6.0	12.65	----
C3000RD20410P4*0	9.0	15.65	6.65
C3000RD20510P4*0	12.0	18.65	9.65
C3000RD20610P4*0	15.0	21.65	12.65
C3000RD20710P4*0	18.0	24.65	15.65
C3000RD20810P4*0	21.0	27.65	18.65
C3000RD20910P4*0	24.0	30.65	21.65
C3000RD21010P4*0	27.0	33.65	24.65
C3000RD21110P4*0	30.0	36.65	27.65
C3000RD21210P4*0	33.0	39.65	30.65

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

404-3.0mm 双排插针 90度 (MX3.0)

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

W30-XXS1ARA

DRAWING NO:

1

2

3

4

5

6

7

8

9