


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric


Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA66 UL94V-2
 Housing: PA66 UL94V-2

2-特性 (characteristics):
 额定电压: 250V AC/DC .
 Voltage Rating: 250V AC/DC .
 额定电流: 5 AMP (AWG #22-24) .
 Raring Current: 5AMP (AWG #22-24) .
 接触阻抗: ≤30mΩ MAX.
 Contact Resistance: ≤30mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1500V AC/MINUTE
 Withstanding Voltage: 1500V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°Cto +85°C

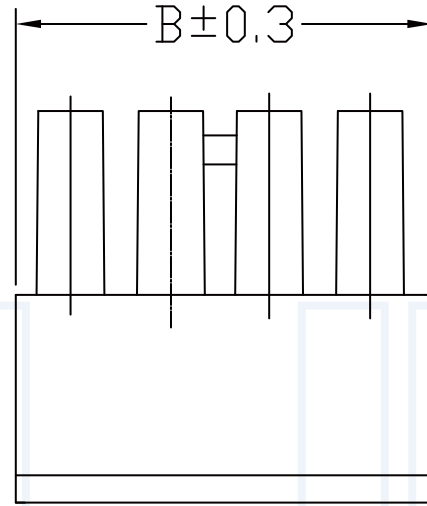



3P-8P CIRCUIT HOUSING

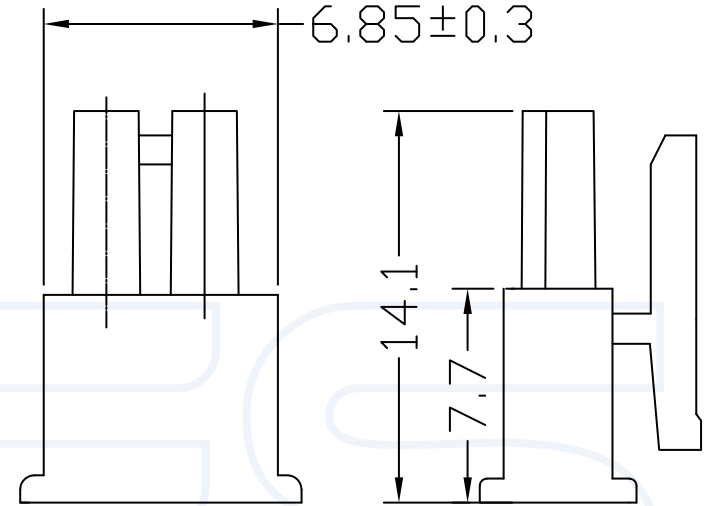

2P CIRCUIT HOUSING

ORDERING INFORMATION

H 30--XX XXX

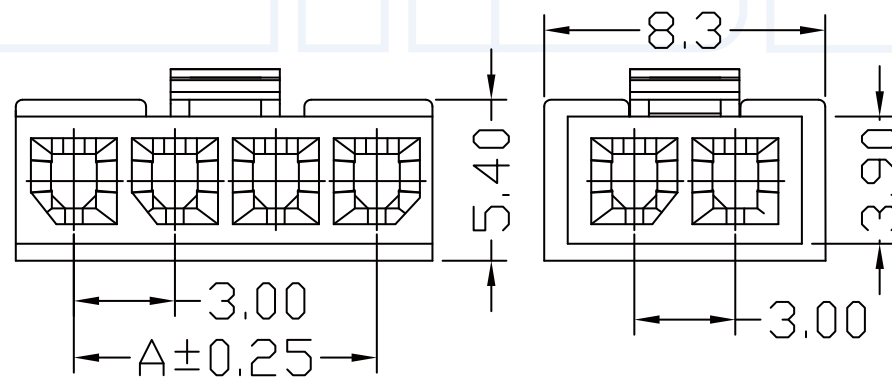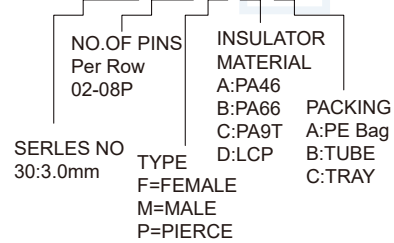

PART NO.	Dimension mm	
	A	B
A3000F00260P60	3.0	6.85
A3000F00360P60	6.0	9.90
A3000F00460P60	9.0	12.90
A3000F00560P60	12.0	15.90
A3000F00660P60	15.0	18.90
A3000F00760P60	18.0	21.90
A3000F00860P60	21.0	24.90

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

401-3.0mm 公胶壳单排(MX3.0)

DATE

2018-02-18

PROJECTON



REV

A

UNIT mm

SCALE 1:1

PAGE 1/1

PART NO:

H30-XXMBA

DRAWING NO: