
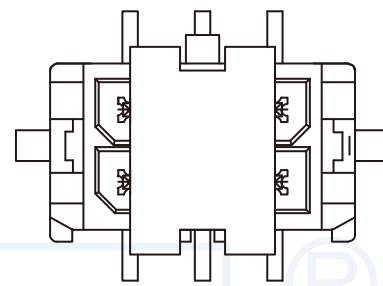
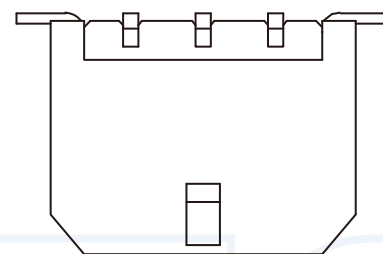


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**



- 1-材料 (MATERIAL)  
 胶芯: PA46 UL94V-0  
 Housing: PA46 UL94V-0  
 端子: 黄铜  
 Contact: Brass
- 2-特性 (characteristics):  
 额定电压: 250V AC/DC  
 Voltage Rating: 250V AC/DC  
 额定电流: 5 AMP(AWG #22-24)  
 Rating Current: 5 AMP(AWG #22-24)  
 接触阻抗: ≤30mΩ MAX.  
 Contact Resistance: ≤30mΩ MAX.  
 绝缘阻抗: ≥1000MΩMIN.  
 Insulating Resistance: ≥1000MΩMIN.  
 耐电压: 1500V AC/MINUTE  
 Withstanding Voltage: 1500V AC/MINUTE  
 温度范围: -25度至+85度  
 Temperature Range: -25°C to +85°C

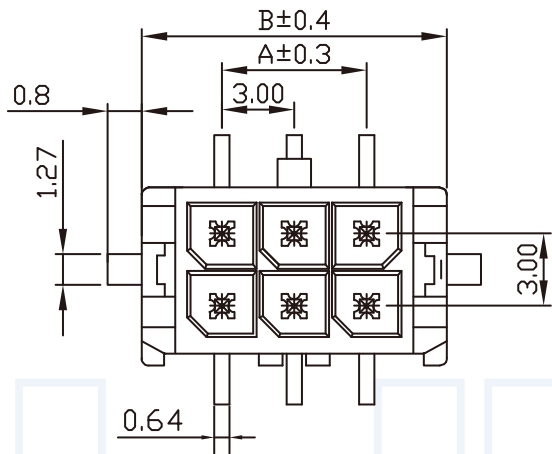

**ORDERING INFORMATION**

**W30-XX XX X XX X**

- |                                 |  |  |
|---------------------------------|--|--|
| NO.OF PINS<br>Per Row<br>02-12P | INSULATOR<br>MATERIAL<br>A:PA46<br>B:PA66<br>C:PA9T<br>D:LCP   | PACKING<br>A:PE Bag<br>B:TUBE<br>C:TRAY  |
| SERLES NO<br>30:3.0mm           | CONTACT PLATING<br>FULL OF GOLD SEMI-GOLD<br>A0=0.8u" B0=0.8U"<br>... ..<br>A9=30u" B9=30U"<br>S1=ORDINARY TIN PLATED<br>S2=MATTE TIN PLATED<br>S3=TIN-PLATED HIGH-TEMPERATURE | CONTACTL SHAPE<br>S: Straight<br>R: Right Angle<br>LT: STRAIGHT SMT<br>WT: RIGHT ANGLE SME |

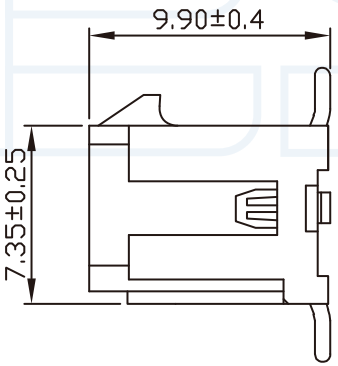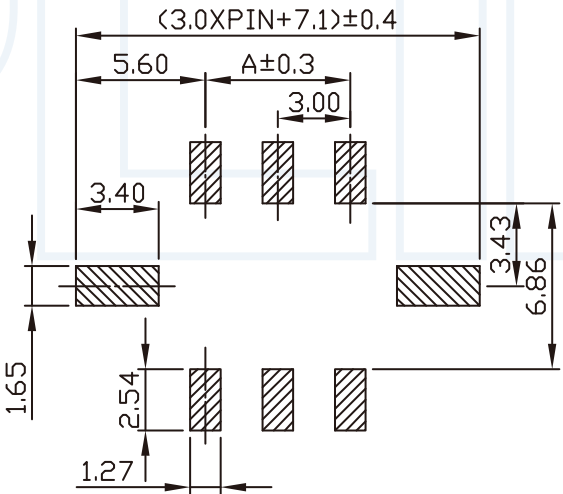

PART NO.	Dimension mm	
	A	B
C3000VS20130LP2B	---	6.65
C3000VS20230LP2B	3.0	9.65
C3000VS20330LP2B	6.0	12.65
C3000VS20430LP2B	9.0	15.65
C3000VS20530LP2B	12.0	18.65
C3000VS20630LP2B	15.0	21.65
C3000VS20730LP2B	18.0	24.65
C3000VS20830LP2B	21.0	27.65
C3000VS20930LP2B	24.0	30.65
C3000VS21030LP2B	27.0	33.65
C3000VS21130LP2B	30.0	36.65
C3000VS21230LP2B	33.0	39.65

**PCB LAYOUT:COMPONENT SIDE**

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE: 405-3.0mm 双排插针 立贴 (MX3.0) DATE: 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: W30-XXS1DLTC DRAWING NO: