

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric






Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA66 UL94V-2
 Housing: PA66 UL94V-2

2-特性 (characteristics):
 额定电压: 250V AC/DC.
 Voltage Rating: 250V AC/DC.
 额定电流: 10 AMP(AWG #16-22).
 Raring Current: 10 AMP(AWG #16-22).
 接触阻抗: ≤10mΩ MAX.
 Contact Resistance: ≤10mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1500V AC/MINUTE
 Withstanding Voltage: 1500V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°Cto +85°C

ORDERING INFORMATION

H 396--XX X X X

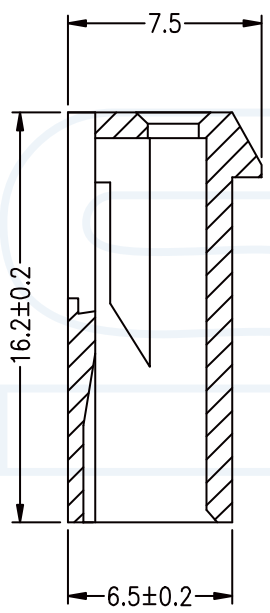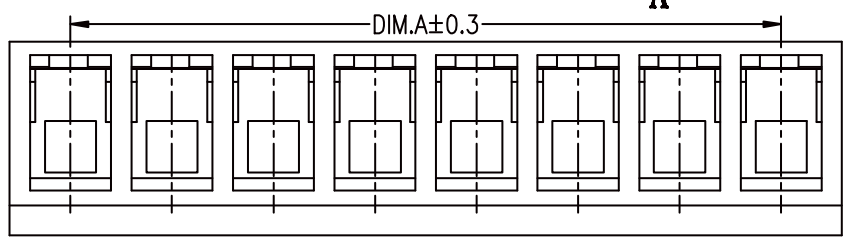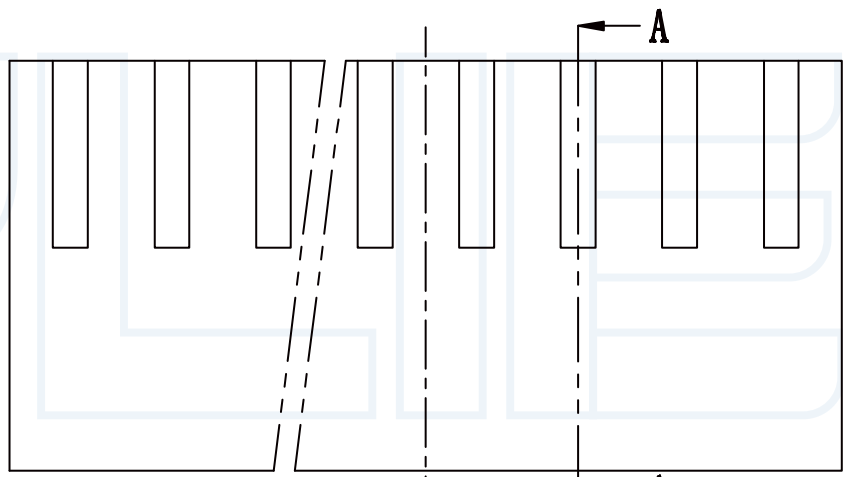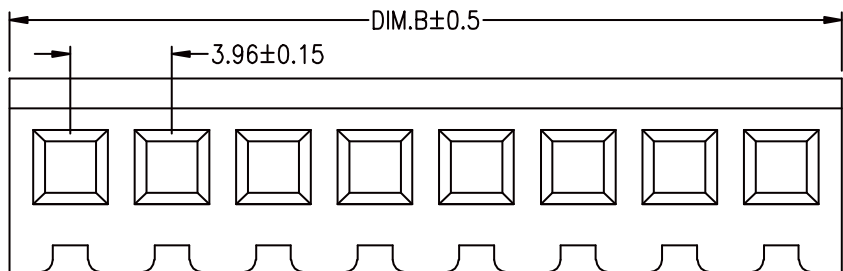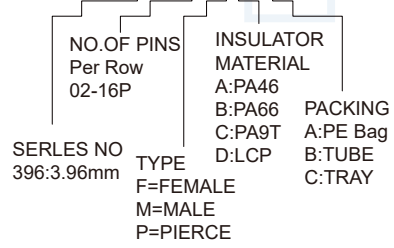

DIM PIN	DIM. A	DIM. B
2Y	3.96	8.52
3Y	7.92	12.48
4Y	11.88	16.44
5Y	15.84	20.40
6Y	19.80	24.36
7Y	23.76	28.32
8Y	27.72	32.28
9Y	31.68	36.24
10Y	35.64	40.20
11Y	39.60	44.16
12Y	43.56	48.12
13Y	47.52	52.08
14Y	51.48	56.04
15Y	55.44	60.00
16Y	59.40	63.96

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE: 421-3.96mm 胶壳(2139) DATE: 2018-02-18

PROJECTON REV: A UNIT: mm SCALE: 1:1 PAGE: 1/1

PART NO: H396-XXXBA DRAWING NO: