

1 2 3 4 5 6 7 8 9

| | | | | | | | |
|-------|--------|-----|-------|-------------|----------|------|------|
| ANGLE | ± 5° | REV | LOCAS | DESCRIPTION | DESIGN | DATE | 卫国峰 |
| X.XXX | ± 0.05 | 01 | | | DRAWN | DATE | 尚伟 |
| X.XX | ± 0.15 | 02 | | | CHECKED | DATE | 吴汉学 |
| X.X | ± 0.25 | 03 | | | AUDITED | DATE | 龚劲松 |
| X | ± 0.50 | 04 | | | APPROVED | DATE | eric |

| Poles | A | B |
|-------|-------|-------|
| 2Y | 3.96 | 8.40 |
| 3Y | 7.92 | 12.36 |
| 4Y | 11.88 | 16.32 |
| 5Y | 15.84 | 20.28 |
| 6Y | 19.80 | 24.24 |
| 7Y | 23.76 | 28.20 |
| 8Y | 27.72 | 32.16 |
| 9Y | 31.68 | 36.12 |
| 10Y | 35.64 | 40.08 |
| 11Y | 39.60 | 44.04 |


Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PA66 UL94V-2
 Housing: PA66 UL94V-2
- 2-特性 (characteristics):
 额定电压: 250V AC/DC .
 Voltage Rating: 250V AC/DC .
 额定电流: 10 AMP(AWG #16-22) .
 Raring Current: 10 AMP(AWG #16-22) .
 接触阻抗: ≤10mΩ MAX.
 Contact Resistance: ≤10mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1500V AC/MINUTE
 Withstanding Voltage: 1500V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°C to +85°C

ORDERING INFORMATION

H 396--XX X X X

| | | |
|---------------------------------|--|---|
| NO.OF PINS Per Row 02-11P | INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP | PACKING A:PE Bag B:TUBE C:TRAY |
| SERLES NO 396:3.96mm | TYPE F=FEMALE M=MALE P=PIERCE | |

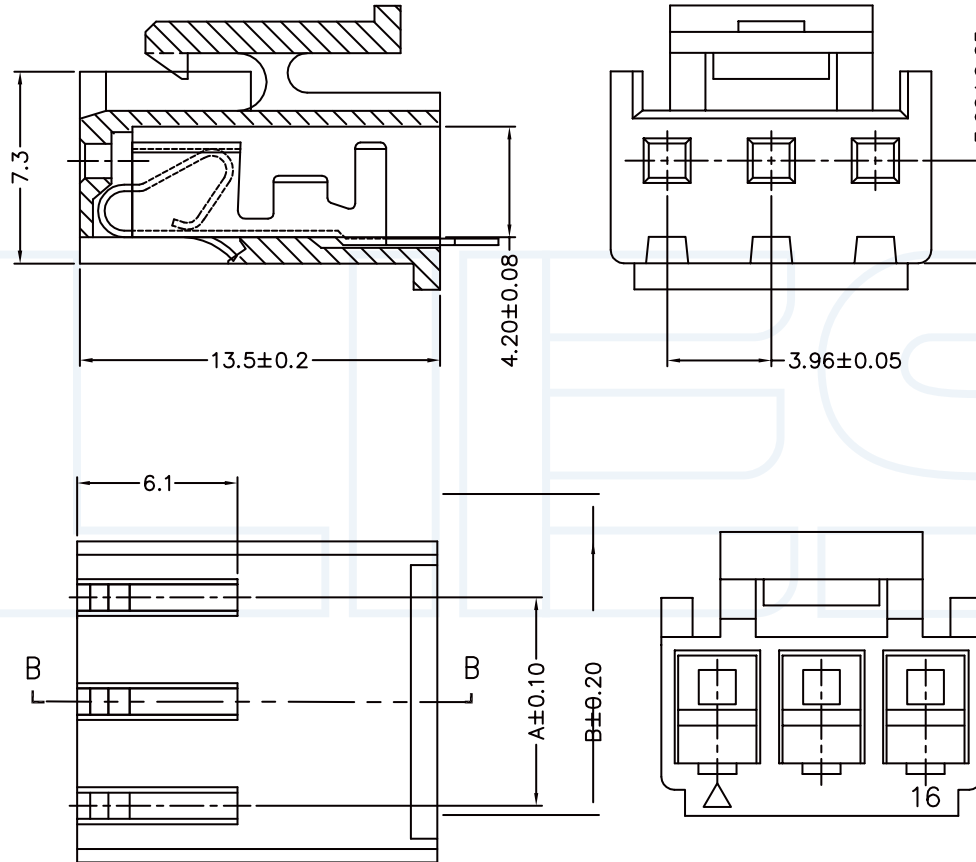

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

418-3.96mm 胶壳(VH)

DATE

2018-02-18

PROJECTON



REV
A

UNIT
mm

SCALE
1:1

PAGE
1/1

PART NO:

H396-XXXBA

DRAWING NO:

1 2 3 4 5 6 7 8 9