

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA66 UL94V-0
Housing: PA66 UL94V-0
端子: 黄铜

Contact: Brass


2-特性 (characteristics):

额定电压: 600V AC/DC .
Voltage Rating: 600V AC/DC .
额定电流: 7 AMP(AWG #20-24) .
Rating Current: 7 AMP(AWG #20-24) .
接触阻抗: ≤10mΩ MAX.
Contact Resistance: ≤10mΩ MAX.
绝缘阻抗: ≥1000MΩMIN.
Insulating Resistance: ≥1000MΩMIN.
耐电压: 1500V AC/MINUTE
Withstanding Voltage: 1500V AC/MINUTE
温度范围: -25度至+85度
Temperture Range: -25°C to +85°C

ORDERING INFORMATION

W42-XX XX X XX X

NO.OF PINS Per Row	INSULATOR MATERIAL	PACKING
02-12P	A: PA66 B: PA66 C: PA9T D: LCP	A: PE Bag B: TUBE C: TRAY
SERIES NO		
42: 4.2mm		
CONTACT PLATING		
FULL OF GOLD SEMI-GOLD		
A0=0.8u" B0=0.8u"		
... ..		
A9=30u" B9=30u"		
S1=ORDINARY TIN PLATED		
S2=MATTE TIN PLATED		
S3=TIN-PLATED HIGH-TEMPERATURE		

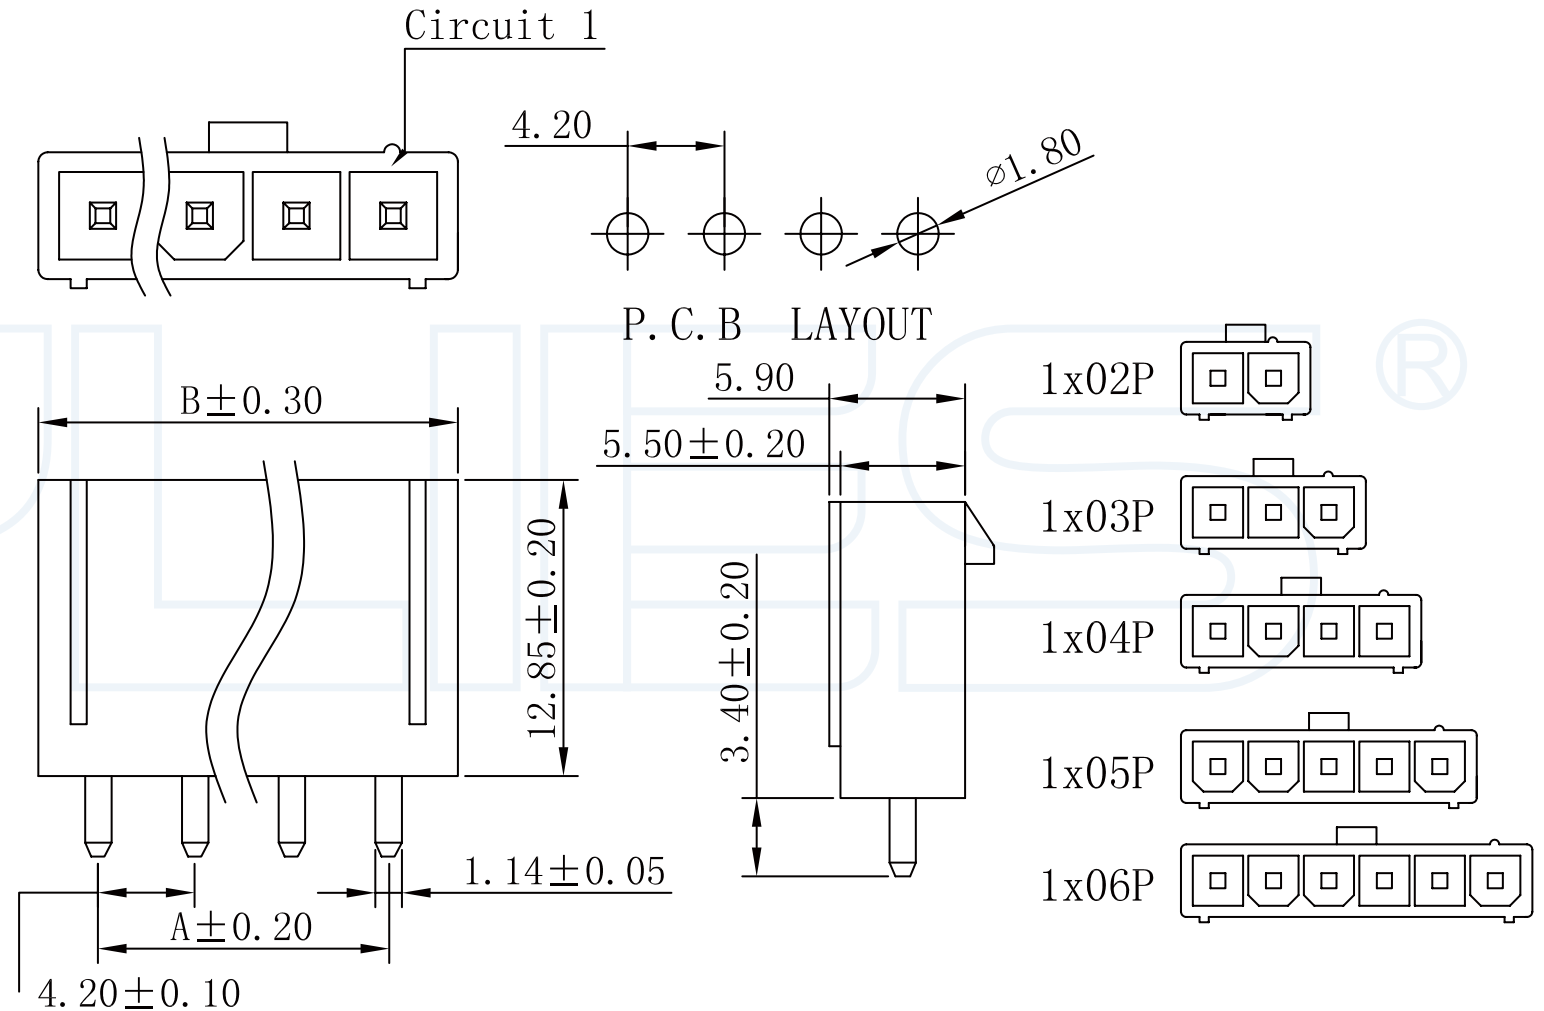

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV	UNIT	SCALE	PAGE
	A	mm	1:1	1/1

TITLE

423-4.2mm 单排插针 180度 (MX4.2)

DATE

2018-02-18

PART NO:

W42-XXS1BSA

DRAWING NO:

1 2 3 4 5 6 7 8 9