

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

### Specifications/备注 (Remark)

#### 1-材料 (MATERIAL)


端子: 黄铜  
Contact: Brass

#### 2-特性 (characteristics):


额定电压: 250V AC/DC .  
Voltage Rating: 250V AC/DC .  
额定电流: 5 AMP (AWG #18-20) .  
Raring Current: 5 AMP (AWG #18-20) .  
接触阻抗: ≤20mΩ MAX.  
Contact Resistance: ≤20mΩ MAX .  
绝缘阻抗: ≥1000MΩMIN.  
Insulating Resistance: ≥1000MΩMIN.  
耐电压: 1500V AC/MINUTE  
Withstanding Voltage: 1500V AC/MINUTE  
温度范围: -25度至+85度  
Temperature Range: -25°Cto +85°C

### ORDERING INFORMATION

**T 63 - XX X X**



SERLES NO  
63:6.3mm  
CONTACT PLATING  
FULL OF GOLD SEMI-GOLD  
A0=0.8u" B0=0.8U"  
.....  
A9=30u" B9=30U"  
S1=ORDINARY TIN PLATED  
S2=MATTE TIN PLATED  
S3=TIN-PLATED HIGH-TEMPERATURE

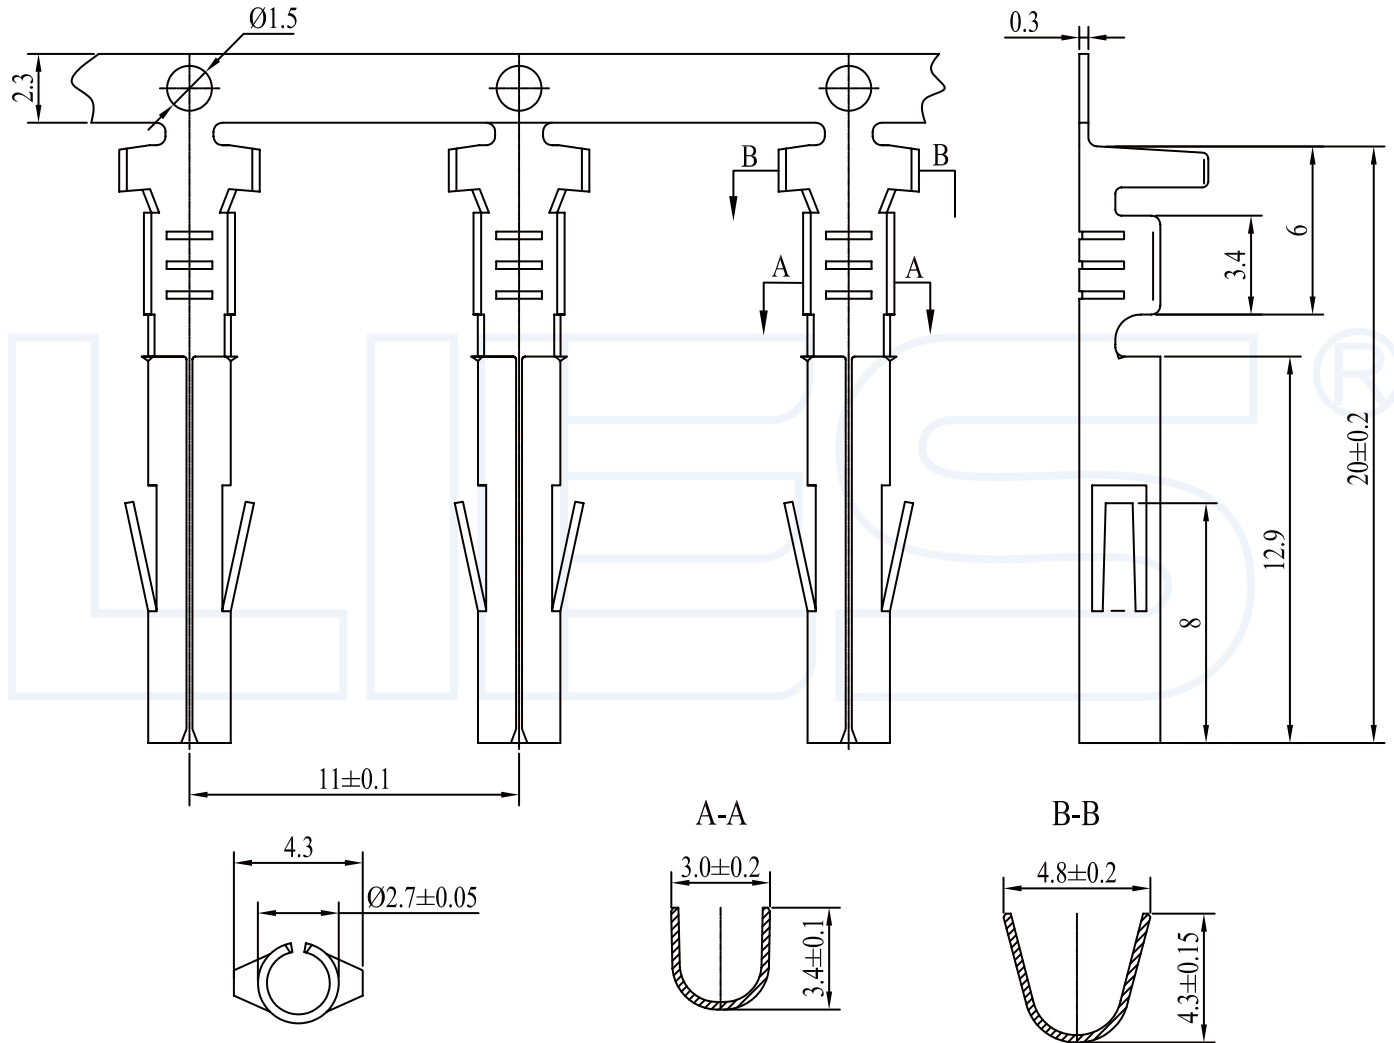

**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

442-6.3mm 母端子 (63080)

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

T63-S1FX

DRAWING NO: