

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric


### Specifications/备注 (Remark)

- 1-材料 (MATERIAL)  
 胶芯: LCP UL94V-0  
 Housing:LCP UL94V-0  
 端子 (焊片): 磷青铜  
 Contact: Phosphor bronze
- 2-特性 (characteristics):  
 额定电压: 50V AC/DC .  
 Voltage Rating:50V AC/DC.  
 额定电流: 0.4 AMP.  
 Raring Current:0.4 AMP .  
 接触阻抗: ≤20mΩ MAX.  
 Contact Resistance:≤20mΩ MAX.  
 绝缘阻抗: ≥500MΩMIN.  
 Insulating Resistance:≥500MΩMIN.  
 耐电压: 200V AC/MINUTE  
 Withstanding Voltage:200V AC/MINUTE  
 温度范围: -25度至+85度  
 Temperature Range: -25°Cto +85°C

### ORDERING INFORMATION

**FPXX-XX XX X XX X**

SERLES NO 05:0.5mm	NO.OF PINS Per Row 04-60P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	CONTACTL SHAPE U:UPPER D:DOWN X:FLIP	CONTACT PLATING FULL OF GOLD SEMI-GOLD S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	PACKING A:PE Bag B:TUBE C:TRAY
-----------------------	---------------------------------	---	---	--	---

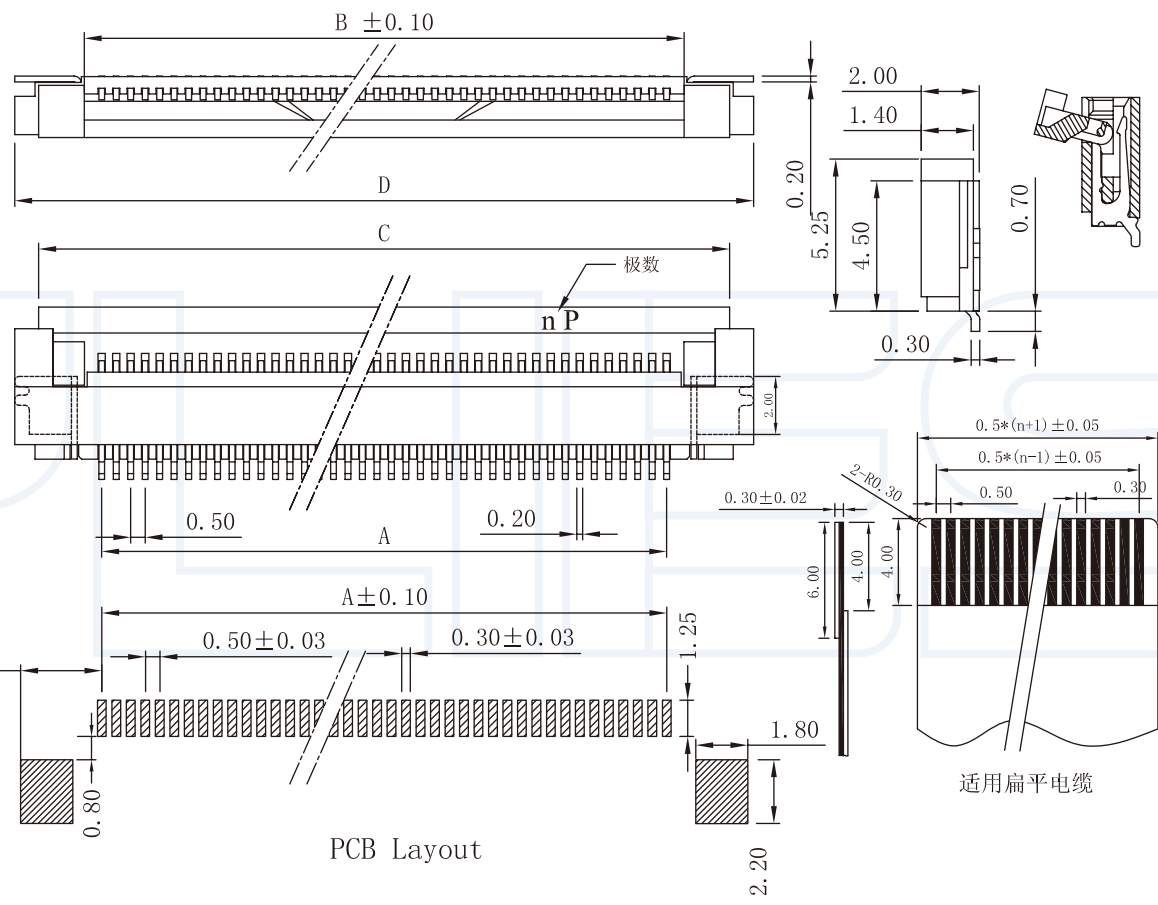

孔位	A	B	C	D
04	01.50	02.60	06.00	07.40
05	02.00	03.10	06.50	07.90
06	02.50	03.60	07.00	08.40
07	03.00	04.10	07.50	08.90
08	03.50	04.60	08.00	09.40
09	04.00	05.10	08.50	09.90
10	04.50	05.60	09.00	10.40
11	05.00	06.10	09.50	10.90
12	05.50	06.60	10.00	11.40
13	06.00	07.10	10.50	11.90
14	06.50	07.60	11.00	12.40
15	07.00	08.10	11.50	12.90
16	07.50	08.60	12.00	13.40
17	08.00	09.10	12.50	13.90
18	08.50	09.60	13.00	14.40
19	09.00	10.10	13.50	14.90
20	09.50	10.60	14.00	15.40
21	10.00	11.10	14.50	15.90
22	10.50	11.60	15.00	16.40
23	11.00	12.10	15.50	16.90
24	11.50	12.60	16.00	17.40
25	12.00	13.10	16.50	17.90
26	12.50	13.60	17.00	18.40
27	13.00	14.10	17.50	18.90
28	13.50	14.60	18.00	19.40
29	14.00	15.10	18.50	19.90
30	14.50	15.60	19.00	20.40
31	15.00	16.10	19.50	20.90
32	15.50	16.60	20.00	21.40
33	16.00	17.10	20.50	21.90
34	16.50	17.60	21.00	22.40
35	17.00	18.10	21.50	22.90
36	17.50	18.60	22.00	23.40
37	18.00	19.10	22.50	23.90
38	18.50	19.60	23.00	24.40
39	19.00	20.10	23.50	24.90
40	19.50	20.60	24.00	25.40
41	20.00	21.10	24.50	25.90
42	20.50	21.60	25.00	26.40
43	21.00	22.10	25.50	26.90
44	21.50	22.60	26.00	27.40
45	22.00	23.10	26.50	27.90
46	22.50	23.60	27.00	28.40
47	23.00	24.10	27.50	28.90
48	23.50	24.60	28.00	29.40
49	24.00	25.10	28.50	29.90
50	24.50	25.60	29.00	30.40
51	25.00	26.10	29.50	30.90
52	25.50	26.60	30.00	31.40
53	26.00	27.10	30.50	31.90
54	26.50	27.60	31.00	32.40
55	27.00	28.10	31.50	32.90
56	27.50	28.60	32.00	33.40
57	28.00	29.10	32.50	33.90
58	28.50	29.60	33.00	34.40
59	29.00	30.10	33.50	34.90
60	29.50	30.60	34.00	35.40

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE: 448-0.5mm FPC插座 掀盖式下接 DATE: 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PART NO: FP05-XXS1DXB DRAWING NO:

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1