

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)


1-材料 (MATERIAL)
 胶芯: LCP UL94V-0
 Housing:LCP UL94V-0
 端子(焊片): 磷青铜
 Contact: Phosphor bronze

2-特性 (characteristics):
 额定电压: 50V AC/DC .
 Voltage Rating:50V AC/DC.
 额定电流: 0.5 AMP.
 Raring Current:0.5AMP .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance:≤20mΩ MAX.
 绝缘阻抗: ≥800MΩMIN.
 Insulating Resistance:≥800MΩMIN.
 耐电压: 500V AC/MINUTE
 Withstanding Voltage:500V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°Cto +85°C

ORDERING INFORMATION

FPXX- XX XX X XX X

SERLES NO 10:1.0mm	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	CONTACT SHAPE U:UPPER D:DOWN X:FLIP	PACKING A:PE Bag B:TUBE C:TRAY
NO.OF PINS Per Row 04-36P			
CONTACT PLATING FULL OF GOLD SEMI-GOLD S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE			

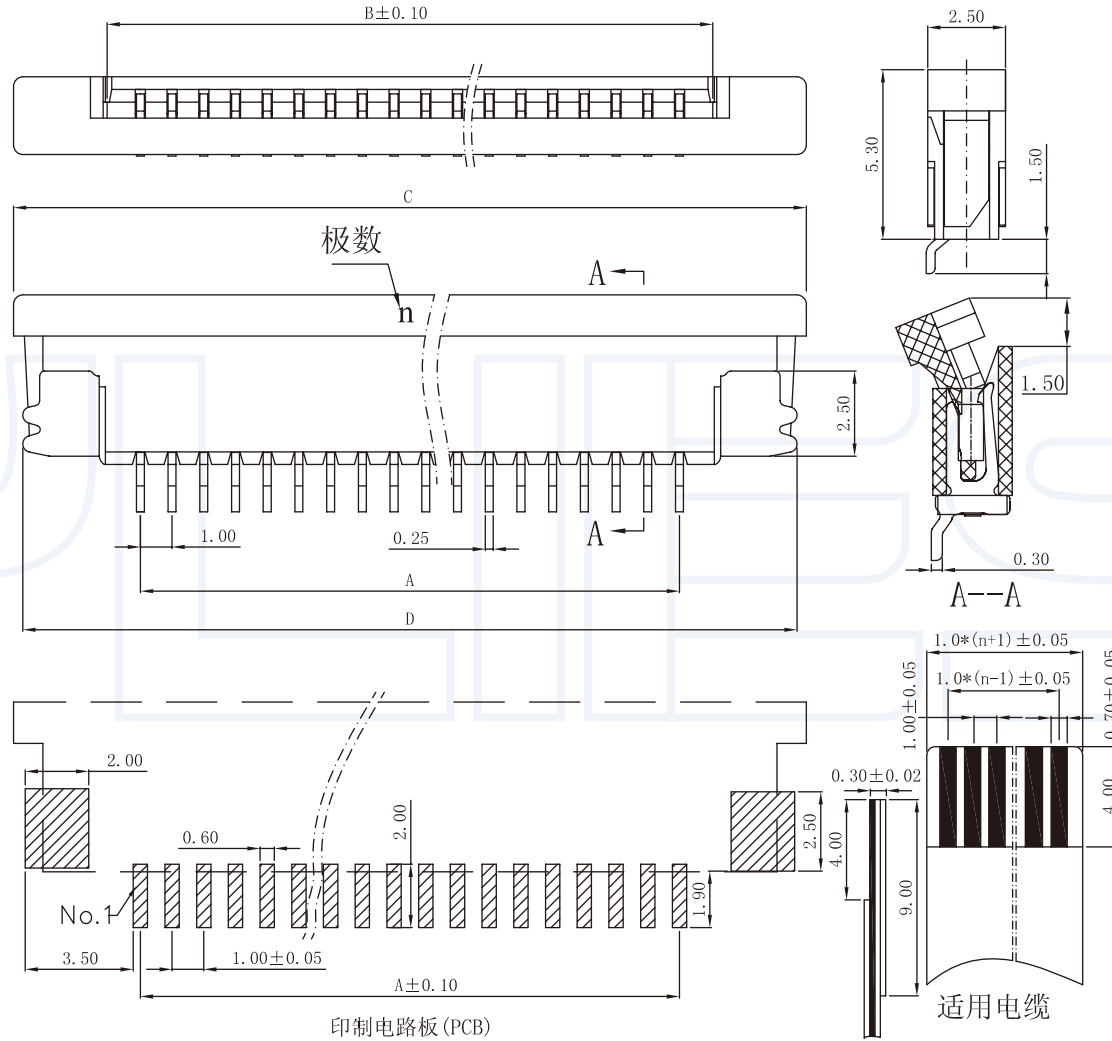

孔位	A	B	C	D
04	03.00	05.15	11.10	10.20
05	04.00	06.15	12.10	11.20
06	05.00	07.15	13.10	12.20
07	06.00	08.15	14.10	13.20
08	07.00	09.15	15.10	14.20
09	08.00	10.15	16.10	15.20
10	09.00	11.15	17.10	16.20
11	10.00	12.15	18.10	17.20
12	11.00	13.15	19.10	18.20
13	12.00	14.15	20.10	19.20
14	13.00	15.15	21.10	20.20
15	14.00	16.15	22.10	21.20
16	15.00	17.15	23.10	22.20
17	16.00	18.15	24.10	23.20
18	17.00	19.15	25.10	24.20
19	18.00	20.15	26.10	25.20
20	19.00	21.15	27.10	26.20
21	20.00	22.15	28.10	27.20
22	21.00	23.15	29.10	28.20
23	22.00	24.15	30.10	29.20
24	23.00	25.15	31.10	30.20
25	24.00	26.15	32.10	31.20
26	25.00	27.15	33.10	32.20
27	26.00	28.15	34.10	33.20
28	27.00	29.15	35.10	34.20
29	28.00	30.15	36.10	35.20
30	29.00	31.15	37.10	36.20
31	30.00	32.15	38.10	37.20
32	31.00	33.15	39.10	38.20
33	32.00	34.15	40.10	39.20
34	33.00	35.15	41.10	40.20
35	34.00	36.15	42.10	41.20
36	35.00	37.15	43.10	42.20

PROJECTON	REV A	UNIT mm	SCALE 1:1	PAGE 1/1	TITLE 449-1.0mm FPC 插座 上接式		DATE 2018-02-18
					PART NO: FP10-XXS1DUB	DRAWING NO:	

1 2 3 4 5 6 7 8 9