

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)


1-材料 (MATERIAL)
 胶芯: PBT UL94V-0
 Housing:PBT UL94V-0
 端子(焊片): 磷青铜
 Contact: Phosphor bronze

2-特性 (characteristics):
 额定电压: 200V AC/DC .
 Voltage Rating:200V AC/DC.
 额定电流: 1 AMP.
 Raring Current:1 AMP .
 接触阻抗: ≤30mΩ MAX.
 Contact Resistance:≤30mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance:≥1000MΩMIN.
 耐电压: 500V AC/MINUTE
 Withstanding Voltage:500V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°Cto +85°C

ORDERING INFORMATION

FPXX - XX XX X XX X

SERLES NO 125:1.25mm	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:PBT	CONTACT SHAPE U:UPPER D:DOWN S:STRAIGHT
NO.OF PINS Per Row 03-22P	CONTACT PLATING FULL OF GOLD SEMI-GOLD S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	PACKING A:PE Bag B:TUBE C:TRAY

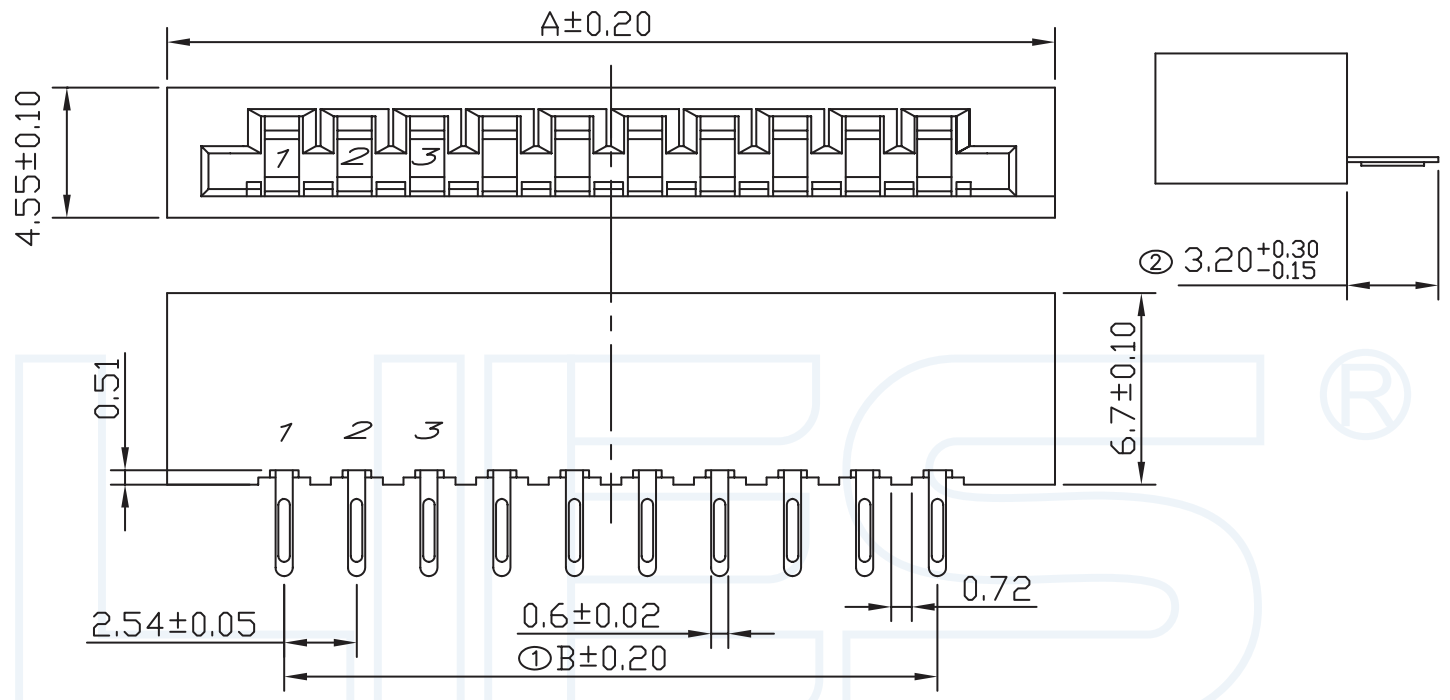

	3pin	4pin	5pin	6pin	7pin	8pin	9pin	10pin	11pin
A	13.28	15.82	18.36	20.9	23.44	25.98	28.52	31.06	33.6
B	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	25.4
	12pin	13pin	14pin	16pin	17pin	18pin	20pin	22pin	
A	36.14	38.68	41.22	46.3	48.84	51.38	56.46	61.54	
B	27.94	30.48	33.02	38.1	40.64	43.18	48.26	53.34	

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 467-2.54mm FPC插座 180度双面接 DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1 PART NO: FP254-XXS1DSB DRAWING NO: