


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PBT UL94V-0
 Housing: PBT UL94V-0
 端子: 磷青铜
 Contact: Phosphor bronze
- 2-特性 (characteristics):
 额定电流: 5 AMP.
 Raring Current: 5 AMP.
 接触阻抗: ≤30mΩ MAX.
 Contact Resistance: ≤30mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1000V AC/MINUTE
 Withstanding Voltage: 1000V AC/MINUTE
 温度范围: -55度至+105度
 Temperature Range: -55°C to +105°C

ORDERING INFORMATION
DS - 2 F R B0 A X A

D-SUB	INSULATOR MATERIAL
NO.OF PER ROW	A:PBT
2=DUAL ROW	B:PA6T
3=THREE ROW	CONTACTLC:PA9T
TERMINAL	COLOUR
M:MALE	S:STRAIGHT
F:FEMALE	R:RIGHT ANGLE
	D:WELDING LINE
CONTACT PLATING	PACKING
FULL OF GOLD SEMI-GOLD	A:PE Bag
A0=0.8u"	B:TUBE
B0=0.8u"	C:TRAY
A9=30u"	
B9=30u"	

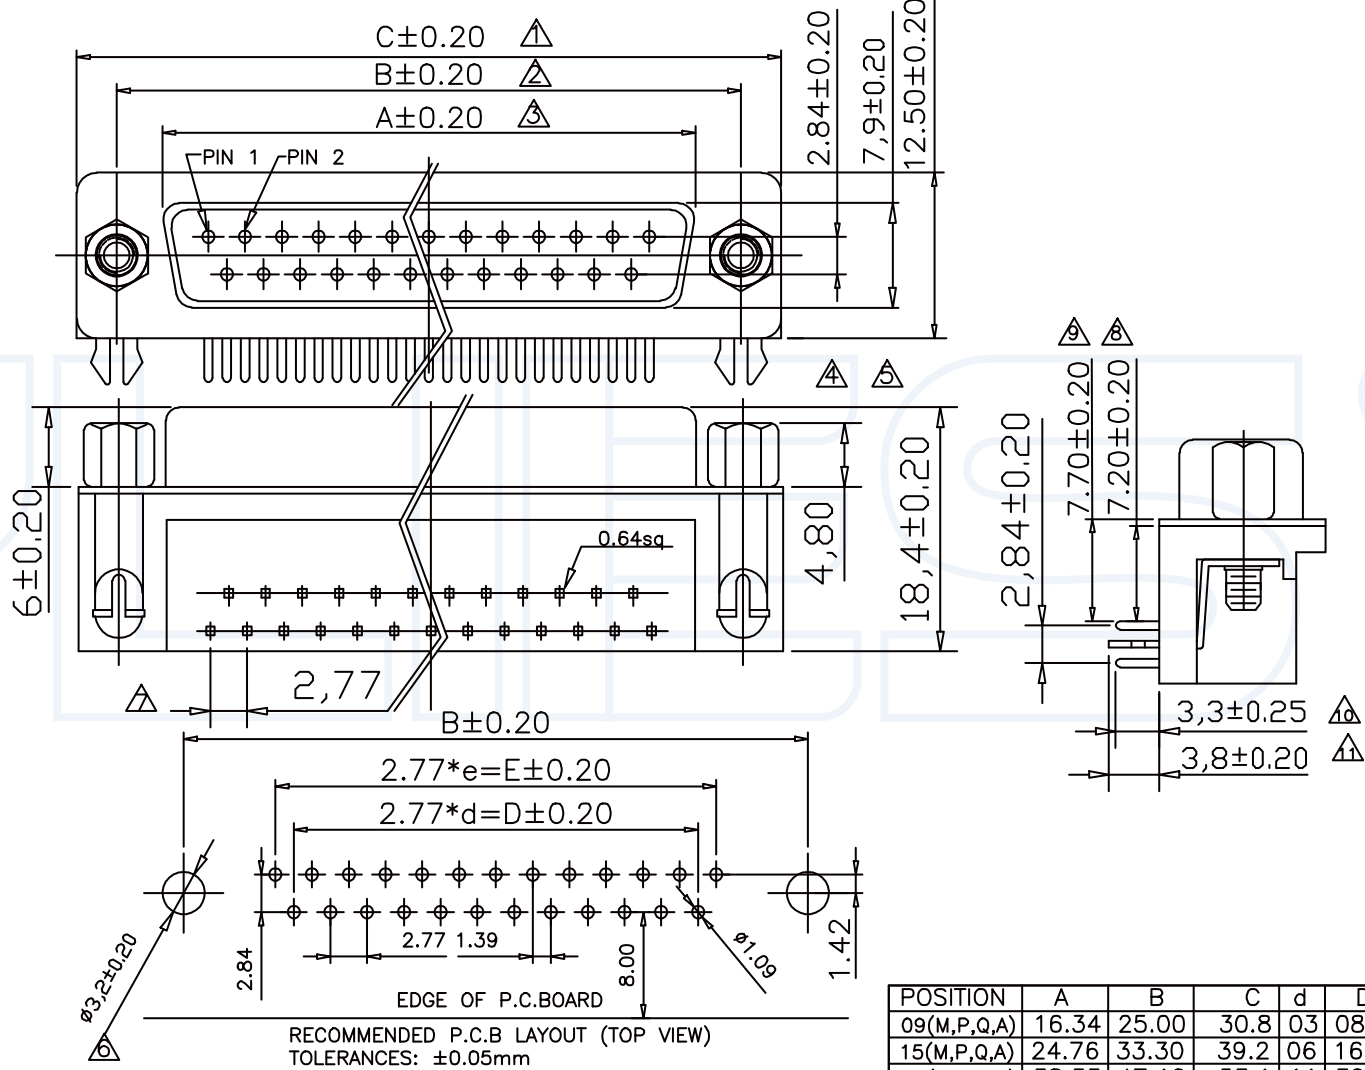

POSITION	A	B	C	d	D	e	E
09(M,P,Q,A)	16.34	25.00	30.8	03	08.31	04	11.08
15(M,P,Q,A)	24.76	33.30	39.2	06	16.62	07	19.39
25(M,P,Q,A)	38.33	47.10	53.1	11	30.47	12	33.24
37(M,P,Q,A)	54.89	63.50	69.4	17	47.09	18	49.86

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 478-D-SUB 母头插座 双排90度插板式

DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV	UNIT	SCALE	PAGE
	A	mm	1:1	1/1

PART NO:	DRAWING NO:
DS-2FRB0AXA	