
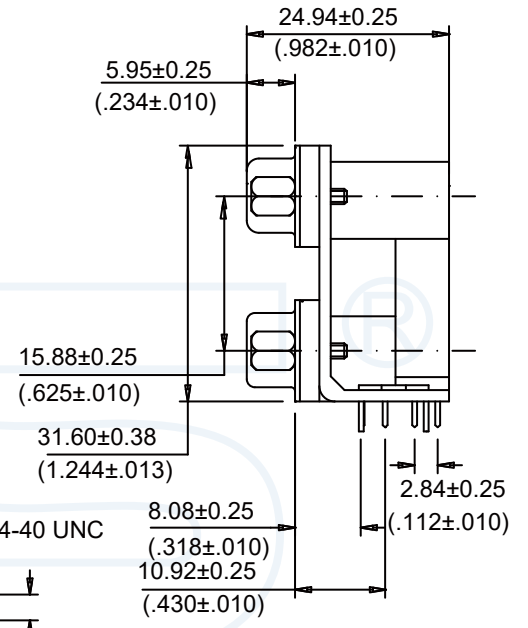
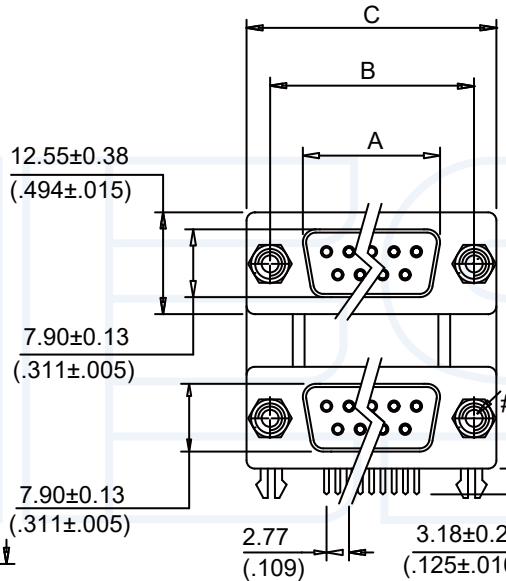


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PBT UL94V-0
 Housing: PBT UL94V-0
 端子: 磷青铜
 Contact: Phosphor bronze

2-特性 (characteristics):
 额定电流: 5 AMP.
 Raring Current: 5 AMP .
 接触阻抗: ≤30mΩ MAX.
 Contact Resistance: ≤30mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1000V AC/MINUTE
 Withstanding Voltage: 1000V AC/MINUTE
 温度范围: -55度至+105度
 Temperature Range: -55°Cto +105°C

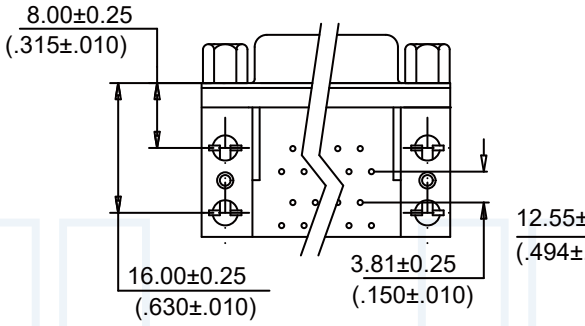


ORDERING INFORMATION
DS - 2 F R B0 A X A

D-SUB NO. OF PER ROW
 2=DUAL ROW
 3=THREE ROW
 TERMINAL M: MALE F: FEMALE

CONTACT PLATING
 FULL OF GOLD SEMI-GOLD
 A0=0.8u" B0=0.8U"

 A9=30u" B9=30U"

INSULATOR MATERIAL
 A: PBT B: PA6T
 CONTACT CLC: PA9T
 SHAPE S: STRAIGHT R: RIGHT ANGLE D: WELDING LINE
 COLOUR B: BLACK L: BLUE
 PACKING A: PE Bag B: TUBE C: TRAY

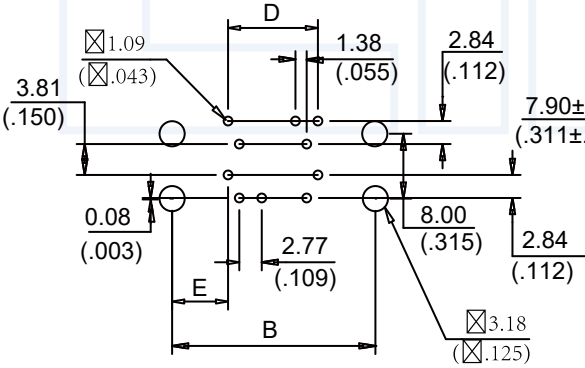

P.C.B LAYOUT

No. of Contact	A ±0.25 ±.010	B ±0.13 ±.005	C ±0.38 ±.015	D	E
18	16.33 .643	24.99 .984	30.81 1.213	11.08 .436	6.96 .274
30	24.66 .971	33.32 1.312	39.14 1.541	19.39 .763	6.96 .274
50	38.38 1.511	47.04 1.852	53.04 2.088	33.24 1.310	6.90 .272
74	54.84 2.159	63.50 2.500	69.32 2.729	49.86 1.963	6.82 .269

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 486-D-SUB 母对母 铆事双爪鱼叉 (8.08X8.0) 锁4.8头螺丝 DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: DS-2FRB0AXA DRAWING NO: