

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PBT UL94V-0

Housing: PBT UL94V-0

端子: 磷青铜

Contact: Phosphor bronze

2-特性 (characteristics):

额定电流: 5 AMP.

Rating Current: 5 AMP.

接触阻抗: ≤30mΩ MAX.

Contact Resistance: ≤30mΩ MAX.

绝缘阻抗: ≥1000MΩMIN.

Insulating Resistance: ≥1000MΩMIN.

耐电压: 1000V AC/MINUTE

Withstanding Voltage: 1000V AC/MINUTE


温度范围: -55度至+105度

Temperature Range: -55°C to +105°C

ORDERING INFORMATION

DS - 2 M R B 0 A X A

D-SUB NO. OF PER ROW 2=DUAL ROW 3=THREE ROW	CONTACT CL: PA9T SHAPE S: STRAIGHT R: RIGHT ANGLE D: WELDING LINE	INSULATOR MATERIAL A: PBT B: PA6T COLOUR B: BLACK L: BLUE	PACKING A: PE Bag B: TUBE C: TRAY
TERMINAL M: MALE F: FEMALE			
CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8u" A9=30u" B9=30u"			

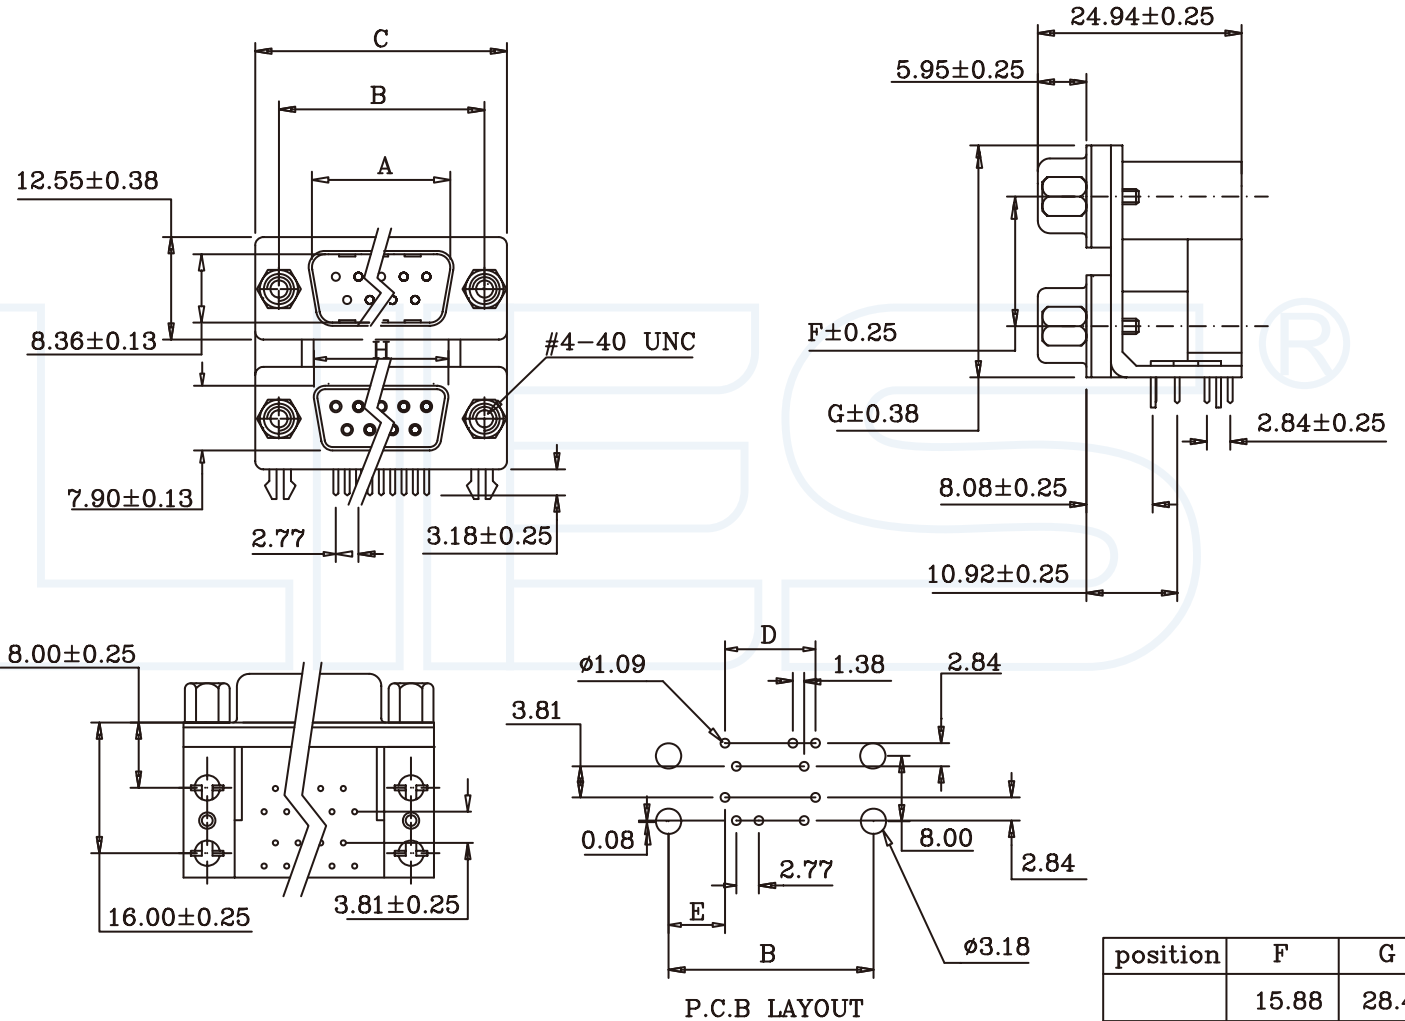

position	F	G
	15.88	28.43
	19.05	31.60


YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel: 0769-85381995 / Fax: 0769-85493987 / Email: ylies@ylies.cn / Web: www.ylies.cn

TITLE 487-D-SUB 公对母 铆事双爪鱼叉 (8.08X8.0) 锁4.8头螺丝

DATE 2018-02-18

PROJECTON



REV A

UNIT mm

SCALE 1:1

PAGE 1/1

PART NO:

DS-2MRB0AXA

DRAWING NO: