

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

**1-材料 (MATERIAL)**

胶芯: PBT UL94V-0  
 Housing:PBT UL94V-0  
 端子: 铜合金  
 Contact: Copper Alloy  
 铁壳: Shell: SPCC





**2-特性 (characteristics):**

额定电流: 1.5 AMP.  
 Raring Current:1.5 AMP .  
 接触阻抗: ≤30mΩ MAX.  
 Contact Resistance:≤30mΩ MAX.  
 绝缘阻抗: ≥1000MΩMIN.  
 Insulating Resistance:≥1000MΩMIN.  
 耐电压: 750V AC/MINUTE  
 Withstanding Voltage:750V AC/MINUTE  
 温度范围: -55度至+85度  
 Temperture Range: -20°Cto +85°C

**ORDERING INFORMATION**

**U - 1 F S B 0 A X A**

NO.OF PER ROW	CONTACT:LCP	INSULATOR MATERIAL
1=ONE ROW	SHAPE	A:PBT
2=DUAL ROW	S:STRAIGHT	B:PA6T
TERMINAL	R:RIGHT ANGLE	COLOUR
M:MALE	M:SMT	B:BLACK
F:FEMALE		L:BLUE
CONTACT PLATING		PACKING
FULL OF GOLD SEMI-GOLD		A:PE Bag
A0=0.8u"	B0=0.8u"	B:TUBE
.....	.....	C:TRAY
A9=30u"	B9=30u"	D:BOX

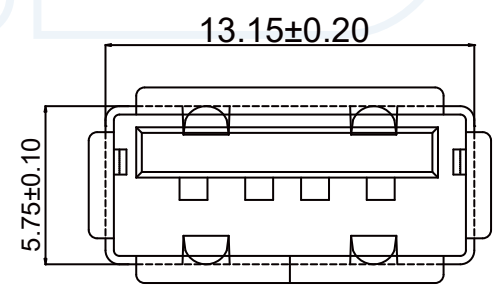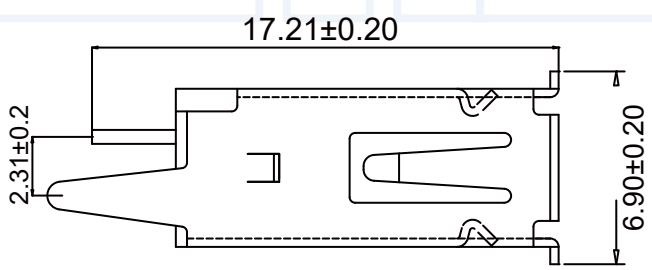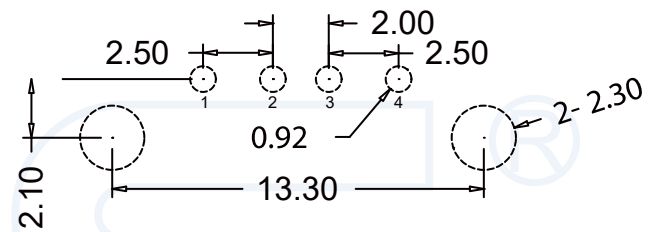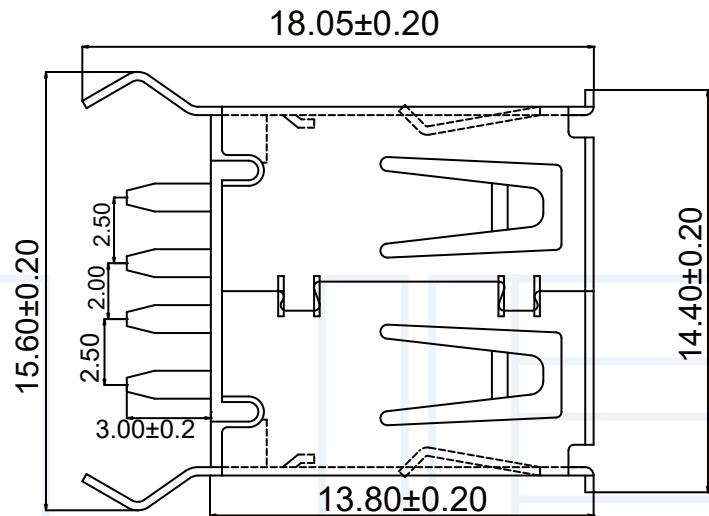

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 499-USB 母座180度 A-TYPE DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: U-1FSB0ABD DRAWING NO:

1 2 3 4 5 6 7 8 9