


1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PBT UL94V-0
 Housing:PBT UL94V-0
 端子: 铜合金
 Contact: Copper Alloy
 铁壳: Shell: SPCC

2-特性 (characteristics):
 额定电流: 1.5 AMP.
 Raring Current:1.5 AMP .
 接触阻抗: ≤30mΩ MAX.
 Contact Resistance:≤30mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance:≥1000MΩMIN.
 耐电压: 750V AC/MINUTE
 Withstanding Voltage:750V AC/MINUTE
 温度范围: -55度至+85度
 Temperature Range: -20°Cto +85°C

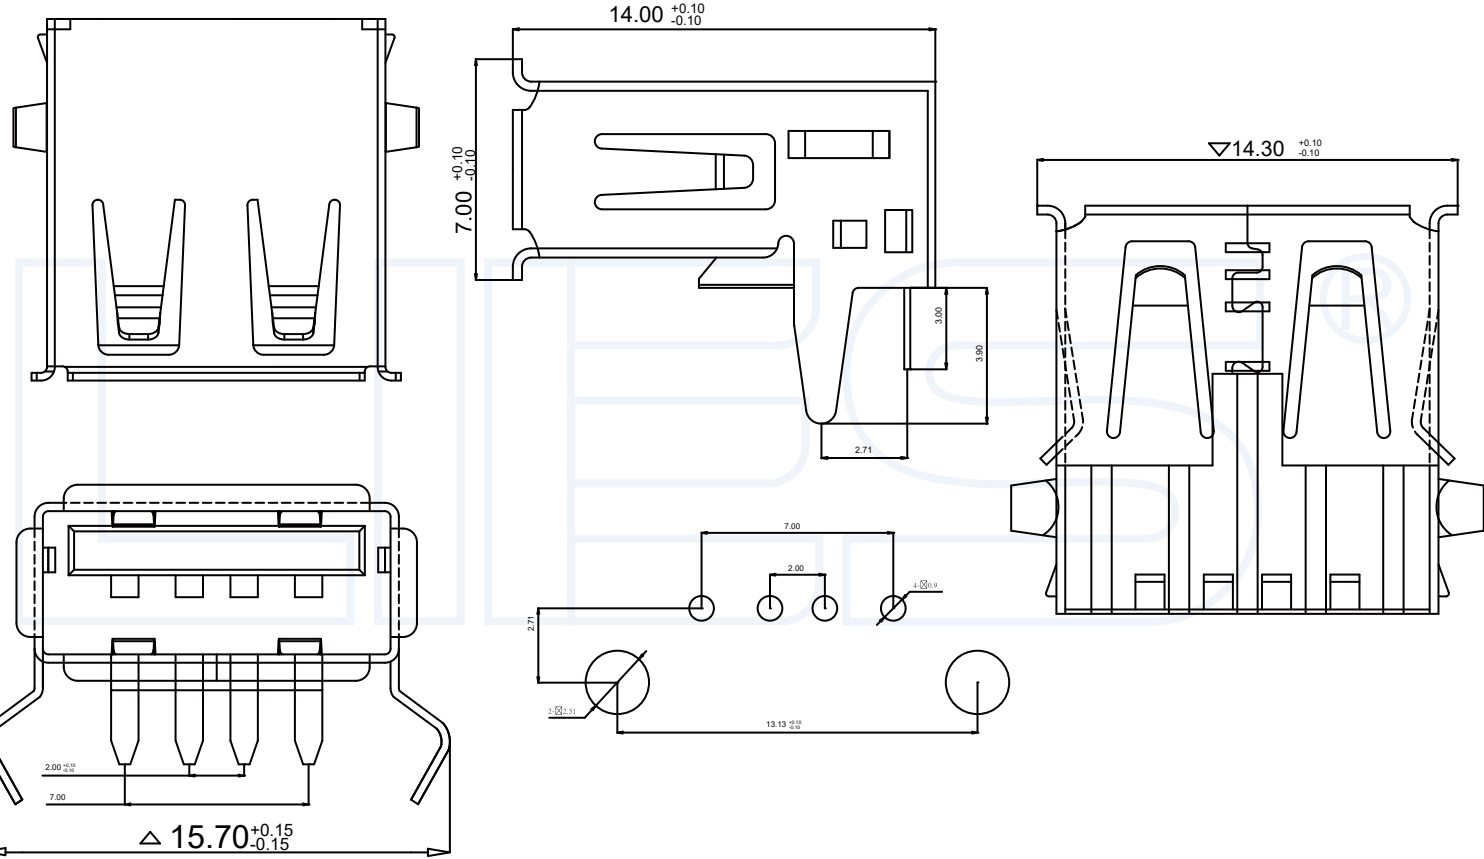

ORDERING INFORMATION

U - 1 F R B0 A X A

USB	NO.OF PER ROW	CONTACTE:LCP	INSULATOR MATERIAL	COLOUR
1=ONE ROW	2=DUAL ROW	S:STRAIGHT	A:PBT	B:BLACK
TERMINAL	R:RIGHT ANGLE	M:MALE	B:PA6T	L:BLUE
F:FEMALE	M:SMT			
CONTACT PLATING				PACKING
FULL OF GOLD SEMI-GOLD				A:PE Bag
A0=0.8u"	B0=0.8U"			B:TUBE
...	...			C:TRAY
A9=30u"	B9=30U"			D:BOX

PROJECTON	REV A	UNIT mm	SCALE 1:1	PAGE 1/1	TITLE	500-USB 母座90度 A-TYPE	DATE	2018-02-18
					PART NO:	U-1FRB0ABD	DRAWING NO:	

1 2 3 4 5 6 7 8 9