

| ANGLE | ± 5° | REV | LOCAS | DESCRIPTION | DESIGN | DATE | 卫国峰 |
|-------|--------|-----|-------|-------------|----------|------|------|
| X.XXX | ± 0.05 | 01 | | | DRAWN | DATE | 尚伟 |
| X.XX | ± 0.15 | 02 | | | CHECKED | DATE | 吴汉学 |
| X.X | ± 0.25 | 03 | | | AUDITED | DATE | 龚劲松 |
| X | ± 0.50 | 04 | | | APPROVED | DATE | eric |

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PBT UL94V-0
Housing: PBT UL94V-0

端子: 铜合金
Contact: Copper Alloy
铁壳: Shell: SPCC


2-特性 (characteristics):

额定电流: 1.5 AMP.
Rating Current: 1.5 AMP.
接触阻抗: ≤30mΩ MAX.
Contact Resistance: ≤30mΩ MAX.
绝缘阻抗: ≥1000MΩMIN.
Insulating Resistance: ≥1000MΩMIN.
耐电压: 500V AC/MINUTE
Withstanding Voltage: 500V AC/MINUTE
温度范围: -55度至+85度
Temperature Range: -55°C to +85°C

ORDERING INFORMATION

U - 2 F H B0 A X D

| | | |
|------------------------|--------------------|----------|
| USB | INSULATOR MATERIAL | |
| NO.OF PER ROW | A:PBT | |
| 1=ONE ROW | B:PA6T | |
| 2=DUAL ROW | CONTACT: LCP | COLOUR |
| TERMINAL | SHAPE | B:BLACK |
| M:MALE | S:STRAIGHT | L:BLUE |
| F:FEMALE | R:RIGHT ANGLE | |
| | H:VERTICAL SIDE | |
| CONTACT PLATING | | PACKING |
| FULL OF GOLD SEMI-GOLD | | A:PE Bag |
| A0=0.8u" | B0=0.8U" | B:TUBE |
| | | C:TRAY |
| A9=30u" | B9=30U" | D:BOX |

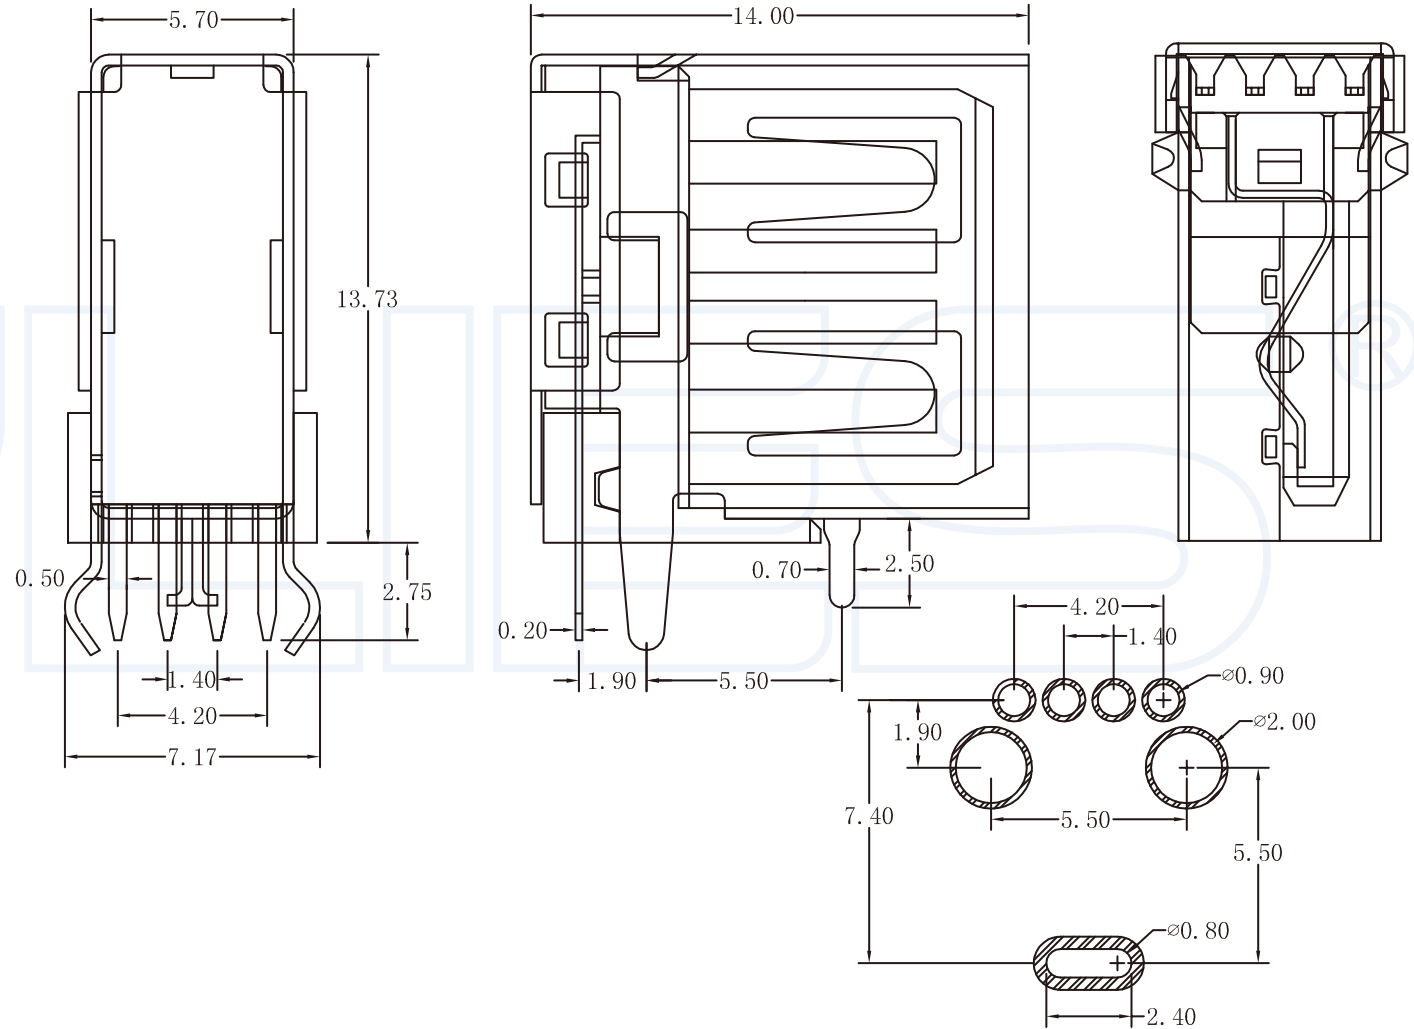

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON  REV A UNIT mm SCALE 1:1 PAGE 1/1

TITLE

503-USB 母座侧插短体无卷边

DATE

2018-02-18

PART NO:

U-2FHB0ABD

DRAWING NO: