


1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

### Specifications/备注 (Remark)

- 1-材料 (MATERIAL)  
 胶芯: LCP UL94V-0  
 Housing: LCP UL94V-0  
 端子: 黄铜  
 Contact: Copper Alloy  
 铁壳: Shell: SUS304
- 2-特性 (characteristics):  
 额定电流: 0.5 AMP.  
 Raring Current: 0.5 AMP.  
 接触阻抗: ≤40mΩ MAX.  
 Contact Resistance: ≤40mΩ MAX.  
 绝缘阻抗: ≥1000MΩMIN.  
 Insulating Resistance: ≥1000MΩMIN.  
 耐电压: 500V AC/MINUTE  
 Withstanding Voltage: 500V AC/MINUTE  
 温度范围: -25度至+90度  
 Temperature Range: -25°Cto +90°C

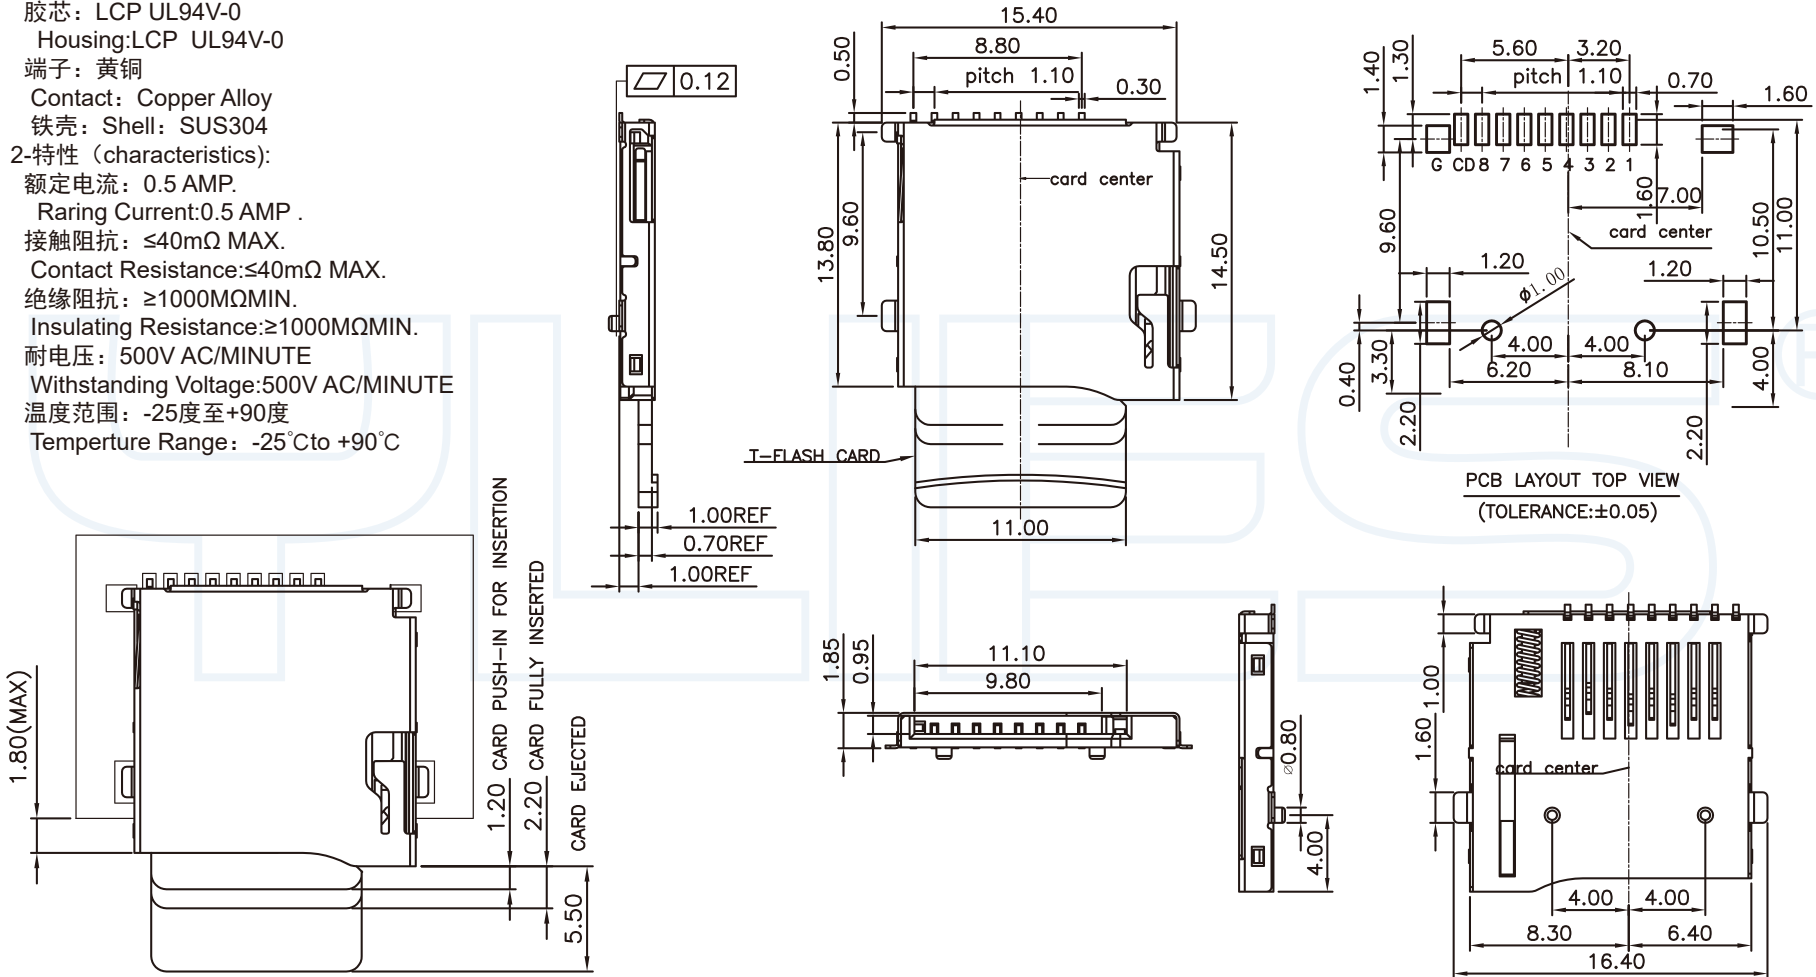

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON		REV	UNIT	SCALE	PAGE
		A	mm	1:1	1/1

TITLE: 519-TF卡座贴片 PUSH DATE: 2018-02-18

PART NO: ETF01081102001X DRAWING NO:

1 2 3 4 5 6 7 8 9