
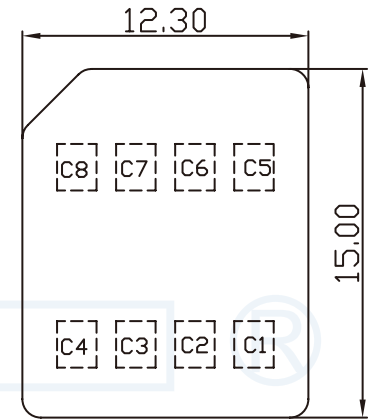
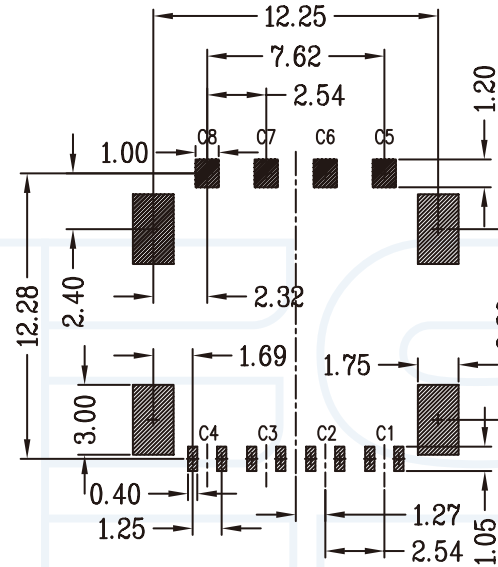
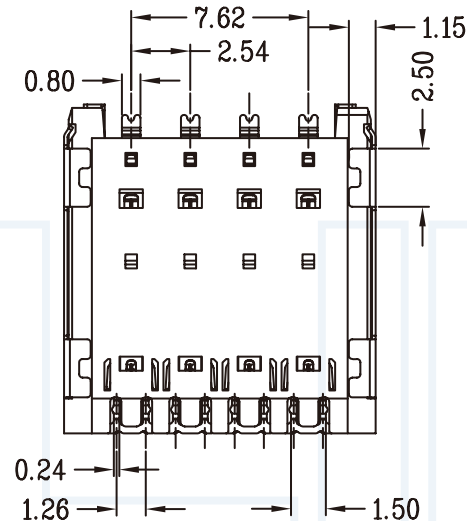


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

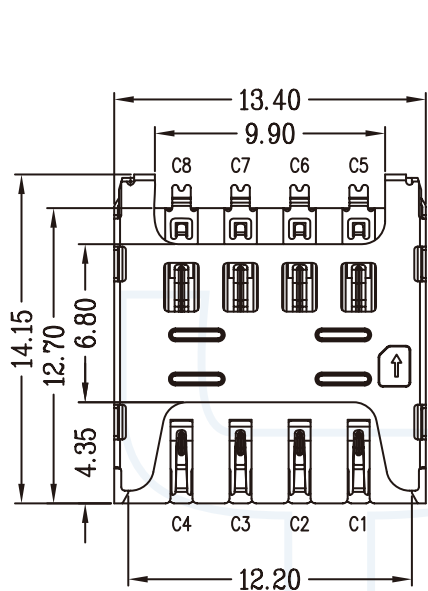

MICRO-SIM CARD DIM.(REF.)

SIM CARD PIN ASSIGNMENT:

PIN NO.	NAME
P1	C1:VCC
P2	C2:RST
P3	C3:CLK
P4	RESERVED
P5	C4:GND
P6	C5:VPP
P7	C6:DATA I/O
P8	RESERVED


Specifications/ 备注 (Remark)

1-材料 (MATERIAL)

胶芯: LCP UL94V-0 Housing:LCP UL94V-0
端子: 黄铜 Contact: Copper Alloy

2-特性 (characteristics):

额定电流: 1.0 AMP. Raring Current:1.0 AMP .
接触阻抗: ≤30mΩ MAX. Contact Resistance:≤30mΩ MAX.
绝缘阻抗: ≥1000MΩMIN. Insulating Resistance:≥1000MΩMIN.
耐电压: 500V AC/MINUTE Withstanding Voltage:500V AC/MINUTE
温度范围: -20度至+85度 Temperture Range: -20°Cto +85°C

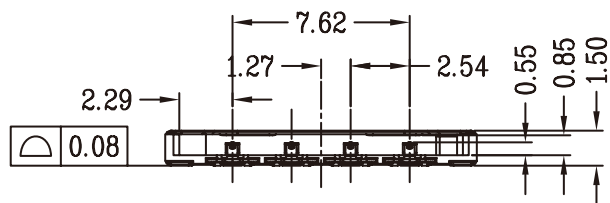

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON  REV A UNIT mm SCALE 1:1 PAGE 1/1

TITLE

524-MICRO SIM卡座PUSH

DATE

2018-02-18

PART NO:

ESIM0708254150001

DRAWING NO: