

| | | | | | | | |
|-------|--------|-----|-------|-------------|----------|------|------|
| ANGLE | ± 5° | REV | LOCAS | DESCRIPTION | DESIGN | DATE | 卫国峰 |
| X.XXX | ± 0.05 | 01 | | | DRAWN | DATE | 尚伟 |
| X.XX | ± 0.15 | 02 | | | CHECKED | DATE | 吴汉学 |
| X.X | ± 0.25 | 03 | | | AUDITED | DATE | 龚劲松 |
| X | ± 0.50 | 04 | | | APPROVED | DATE | eric |

Specifications/备注 (Remark)






1-材料 (MATERIAL)
 胶芯: PA9T UL94V-0
 Housing: PA9T UL94V-0
 端子(焊片): 磷青铜
 Contact (Solder Tab): Phosphor bronze

2-特性 (characteristics):
 额定电压: 50V AC/DC .
 Voltage Rating: 50V AC/DC .
 额定电流: 1 AMP (AWG #28-32) .
 Raring Current: 1 AMP (AWG #28-32) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance: ≤20mΩ MAX.
 绝缘阻抗: ≥100MΩMIN.
 Insulating Resistance: ≥100MΩMIN.
 耐电压: 500V AC/MINUTE
 Withstanding Voltage: 500V AC/MINUTE
 温度范围: -40度至+85度
 Temperature Range: -40°C to +85°C

ORDERING INFORMATION

W125-XX XX X XX X

| | | |
|---------------------------------|--|--|
| NO.OF PINS Per Row 02-16P | INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP | PACKING A:PE Bag B:TUBE C:TRAY |
| SERLES NO 125:1.25mm | CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8u" | CONTACT SHAPE LT:STRAIGHT SMT WT:RIGHT ANGLE SME |
| A9=30u" B9=30u" | | |
| S1=ORDINARY TIN PLATED | | |
| S2=MATTE TIN PLATED | | |
| S3=TIN-PLATED HIGH-TEMPERATURE | | |

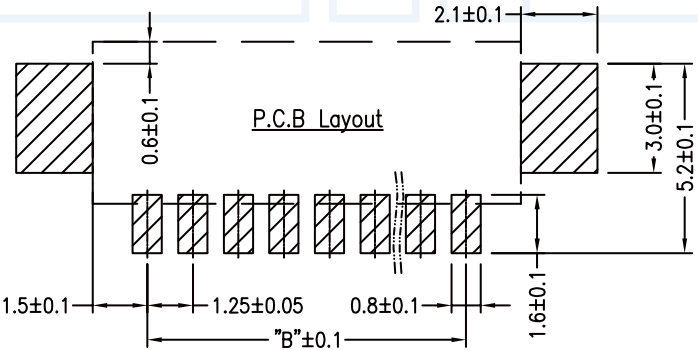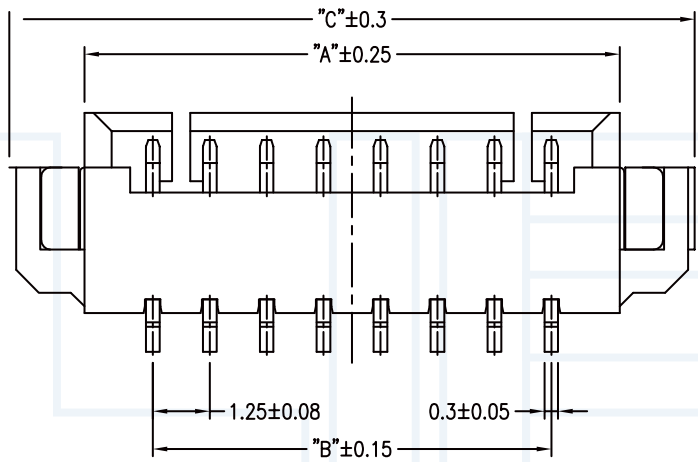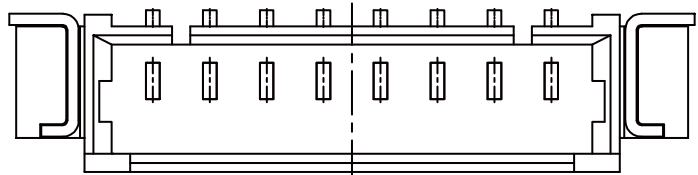

| Poles | DIM.A | DIM.B | DIM.C |
|-------|-------|-------|-------|
| 2A | 4.25 | 1.25 | 7.55 |
| 3A | 5.50 | 2.50 | 8.80 |
| 4A | 6.75 | 3.75 | 10.05 |
| 5A | 8.00 | 5.00 | 11.30 |
| 6A | 9.25 | 6.25 | 12.55 |
| 7A | 10.50 | 7.50 | 13.80 |
| 8A | 11.75 | 8.75 | 15.05 |
| 9A | 13.00 | 10.00 | 16.30 |
| 10A | 14.25 | 11.25 | 17.55 |
| 11A | 15.50 | 12.50 | 18.80 |
| 12A | 16.75 | 13.75 | 20.05 |
| 13A | 18.00 | 15.00 | 21.30 |
| 14A | 19.25 | 16.25 | 22.55 |
| 15A | 20.50 | 17.50 | 23.80 |
| 16A | 21.75 | 18.75 | 25.05 |

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE: 343-1.25mm 单排插针卧贴 DATE: 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: W125-XXXXCWTB DRAWING NO: